


KSB1097

Low Frequency Power Amplifier

- Low Speed Switching Industrial Use
- Complement to KSD1588

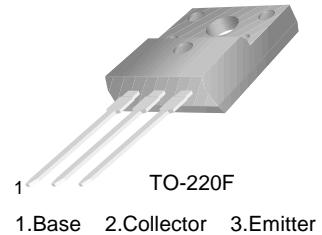

PNP Epitaxial Silicon Transistor

Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Value | Units |
|---------------------|--|------------|------------------|
| V_{CBO} | Collector-Base Voltage | - 80 | V |
| V_{CEO} | Collector-Emitter Voltage | - 60 | V |
| V_{EBO} | Emitter-Base Voltage | - 7 | V |
| I_C | Collector Current (DC) | - 7 | A |
| I_{CP} | *Collector Current (Pulse) | - 15 | A |
| I_B | Base Current | - 3.5 | A |
| P_C | Collector Dissipation ($T_a=25^\circ\text{C}$) | 2 | W |
| $P_{C(\text{max})}$ | Collector Dissipation ($T_C=25^\circ\text{C}$) | 30 | W |
| T_J | Junction Temperature | 150 | $^\circ\text{C}$ |
| T_{STG} | Storage Temperature | - 55 ~ 150 | $^\circ\text{C}$ |

* PW≤300μs, Duty Cycle≤10%

Electrical Characteristics $T_C=25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Test Condition | Min. | Max. | Units |
|------------------------|--------------------------------------|--|----------|-------|---------------|
| I_{CBO} | Collector Cut-off Current | $V_{CB} = - 60\text{V}$, $I_E = 0$ | | - 10 | μA |
| I_{EBO} | Emitter Cut-off Current | $V_{EB} = - 5\text{V}$, $I_C = 0$ | | - 10 | μA |
| h_{FE1} h_{FE2} | * DC Current Gain | $V_{CE} = - 1\text{V}$, $I_C = - 3\text{A}$ $V_{CE} = - 1\text{V}$, $I_C = - 5\text{A}$ | 40 20 | 200 | |
| $V_{CE(\text{sat})}$ | Collector-Emitter Saturation Voltage | $I_C = - 5\text{A}$, $I_B = - 0.5\text{A}$ | | - 0.5 | V |
| $V_{BE(\text{sat})}$ | * Base-Emitter Saturation Voltage | $I_C = - 5\text{A}$, $I_B = - 0.5\text{A}$ | | - 1.5 | V |

* Pulse Test: PW≤350μs, Duty Cycle≤2% Pulsed

h_{FE} Classification

| Classification | R | O | Y |
|----------------|---------|----------|-----------|
| h_{FE1} | 40 ~ 80 | 60 ~ 120 | 100 ~ 200 |

Typical Characteristics

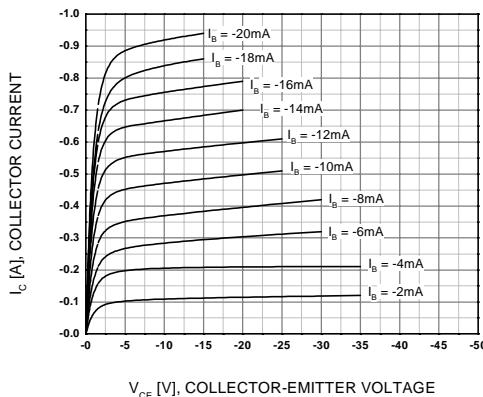


Figure 1. Static Characteristics

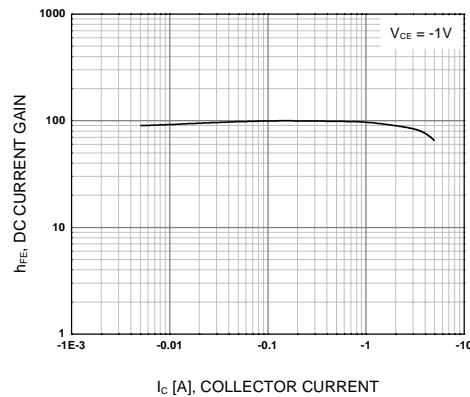


Figure 2. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

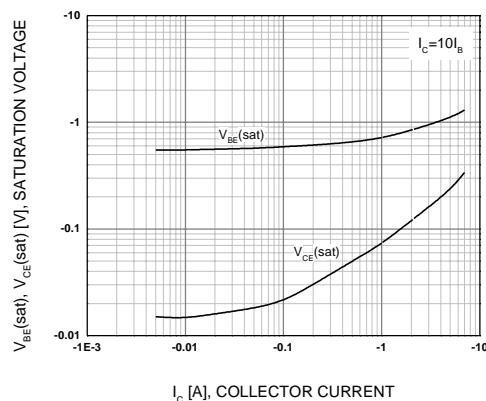


Figure 3. Saturation Voltage

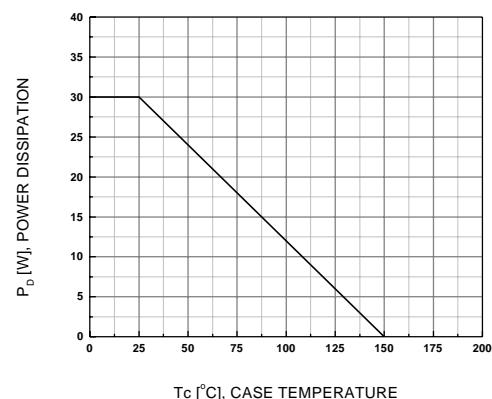


Figure 4. Power Derating

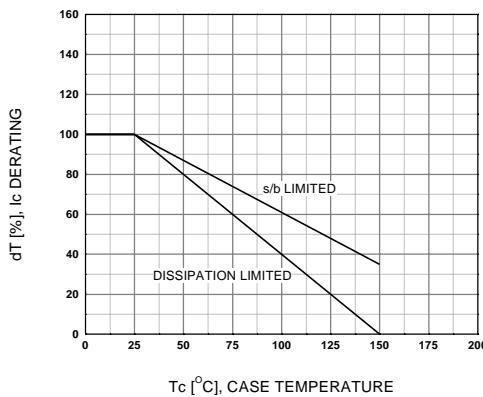


Figure 5. Power Derating

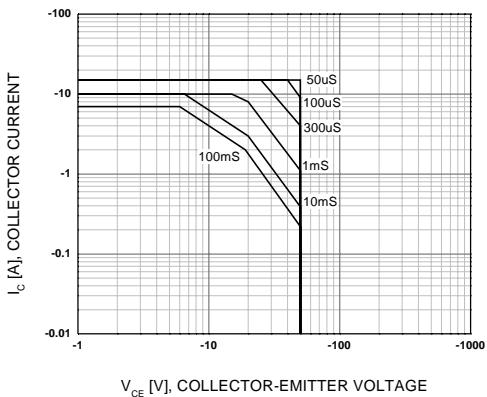


Figure 6. Safe Operating Area