


<p><b>MUR2005-MUR2060</b></p> <p><b>Features:</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> High surge capacity</li> <li><input type="checkbox"/> Low Forward Voltage Drop.</li> <li><input type="checkbox"/> High Current Capability.</li> <li><input type="checkbox"/> Super Fast Switching Speed For High Efficiency</li> </ul>	<p><b>TO-220 -2L</b></p>   1. Cathode      3. Anode
--	---

**Absolute Maximum Ratings** ( $T_a=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	MUR 2005	MUR 2010	MUR 2015	MUR 2020	MUR 2030	MUR 2040	MUR 2060	Unit
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	V
Maximum RMS Voltage	$V_{RMS}$	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	$V_{R(DC)}$	50	100	150	200	300	400	600	V
Average Rectified Forward Current Total Device, (Rated $V_R$ ),	$I_{F(AV)}$					20			A
Nonrepetitive Peak Surge Current(Surge applied at rated load conditions half wave, single phase, 60 Hz)	$I_{FSM}$					200			A
Operating Junction Temperature and Storage Temperature	$T_J, T_{Stg}$				-55 to +150				°C
Maximum Thermal Resistance, Junction-to-Case	$R_{\theta JC}$		3.0			2.0			°C/W

**ELECTRICAL CHARACTERISTICS**

Parameter	Symbol	MUR 2005	MUR 2010	MUR 2015	MUR 2020	MUR 2030	MUR 2040	MUR 2060	Unit
Forward Voltage ( $I_F = 20\text{A}, T_C = 25^\circ\text{C}$ ) (Note 1) ( $I_F = 20\text{ A}, T_C = 150^\circ\text{C}$ )	$V_F$		0.975 0.895			1.30 1.00	1.50 1.20	V	
Maximum Instantaneous Reverse Current (Note 1) (Rated DC Voltage, $T_C = 25^\circ\text{C}$ ) (Rated DC Voltage, $T_C = 150^\circ\text{C}$ )	$I_R$		5 250			10 500		µA	
Maximum Reverse Recovery Time ( $I_F = 1.0\text{ A}, dI/dt = 50\text{ A}/\mu\text{s}$ ) ( $I_F = 0.5\text{ A}, I_R = 1.0\text{ A}, I_{REC} = 0.25\text{ A}$ )	$T_{RR}$			35 25				ns	

 Note 1.Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$

## Typical Characteristics







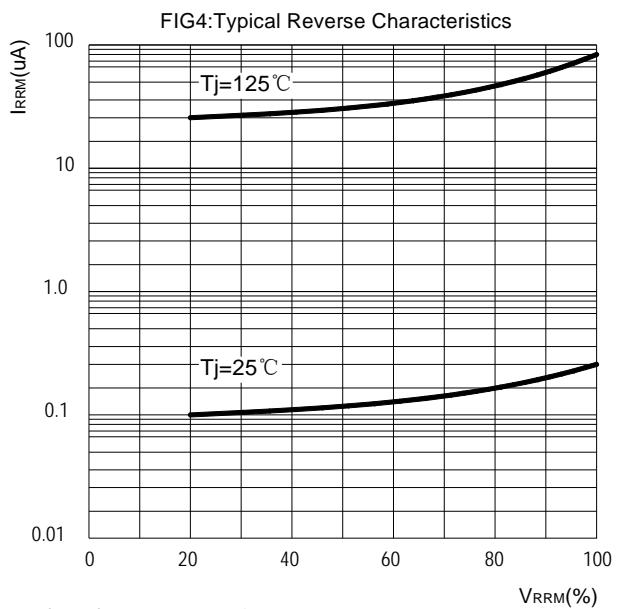


Diagram of circuit and Testing wave form of reverse recovery time

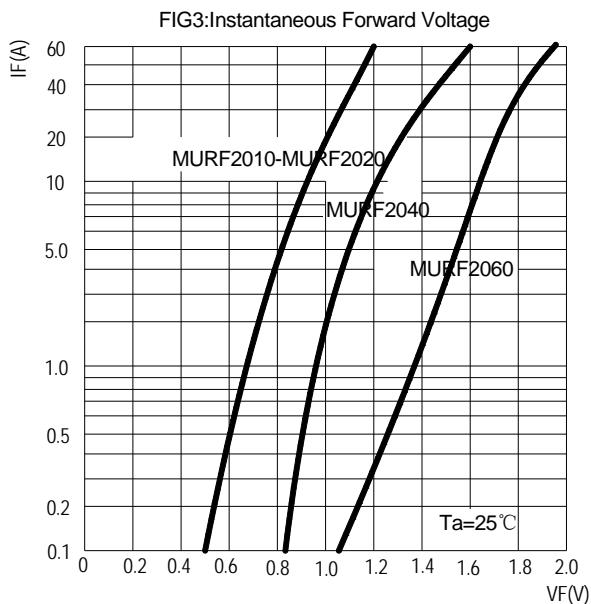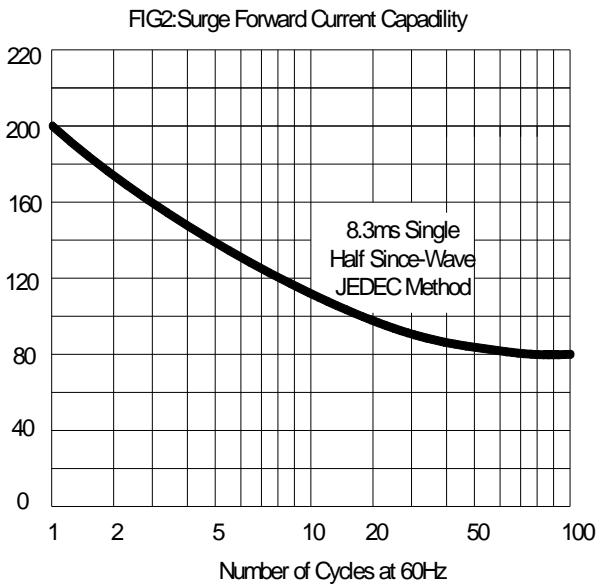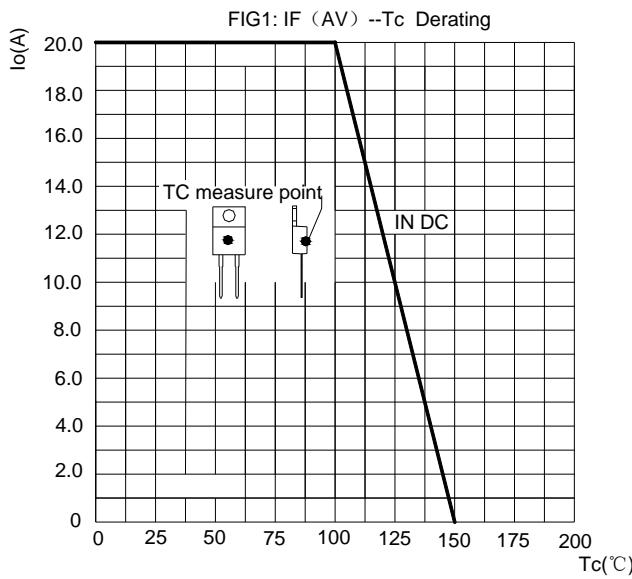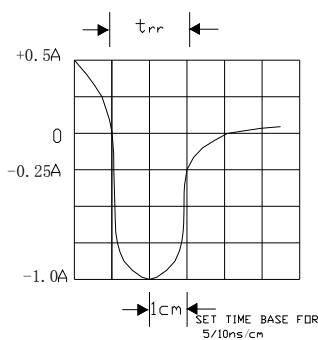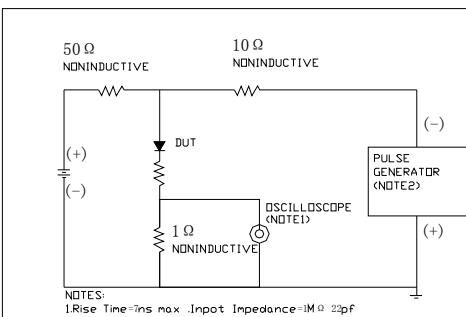

**Package Dimension**
**TO-220 -2L**

Unit: mm

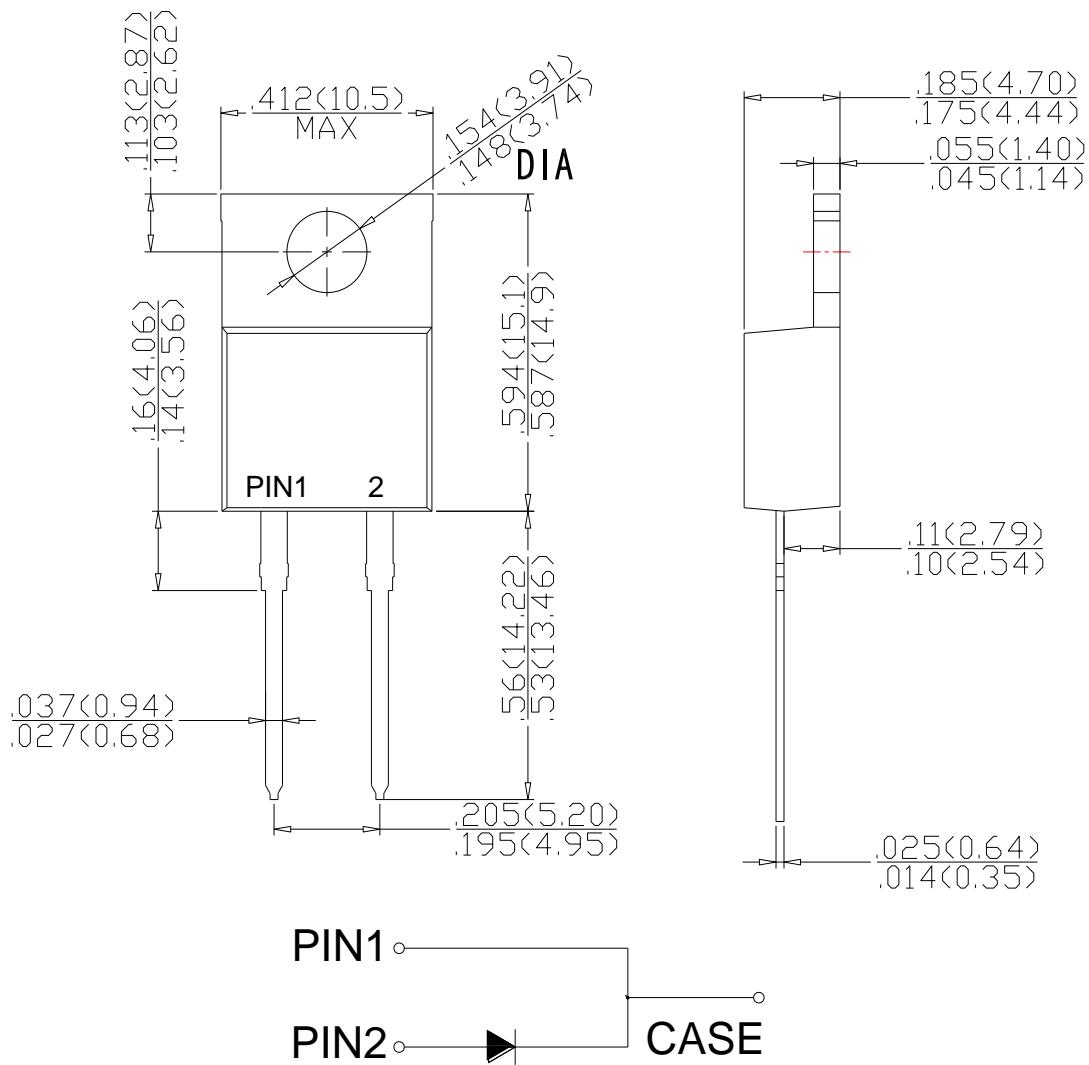

Dimensions in inches and (millimeters)