




STPR1210D/F STPR1220D/F

ULTRA FAST RECOVERY RECTIFIER DIODES

- SUITED FOR SMPS
- LOW LOSSES
- LOW FORWARD AND REVERSE RECOVERY TIME
- HIGH SURGE CURRENT CAPABILITY
- HIGH AVALANCHE ENERGY CAPABILITY

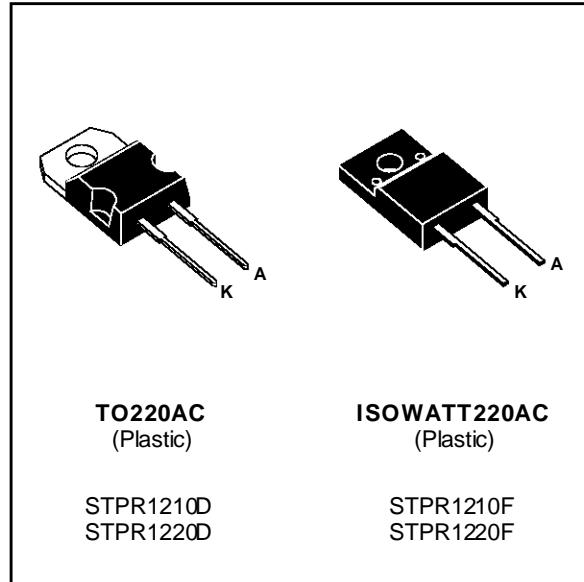

DESCRIPTION

Low cost single chip rectifier suited for switchmode power supply and high frequency DC to DC converters.

Packaged in TO220AC and ISOWATT220AC, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter			Value	Unit
I _F (RMS)	RMS Forward Current			30	A
I _F (AV) $\delta = 0.5$	Average Forward Current $\delta = 0.5$	TO220AC	T _c = 115°C	12	A
		ISOWATT220AC	T _c = 80°C		
I _{FSM}	Surge Non Repetitive Forward Current		T _p = 10 ms Sinusoidal	120	A
T _{stg} T _j	Storage and Junction Temperature Range			- 65 to + 150 - 65 to + 150	°C

Symbol	Parameter	STPR		Unit
		1210D 1210F	1220D 1220F	
V _{RRM}	Repetitive Peak Reverse Voltage	100	200	V

THERMAL RESISTANCE

Symbol	Parameter		Value	Unit
R _{th} (j-c)	Junction-case	TO220AC	2.5	°C/W
		ISOWATT220AC	5.0	

STPR1210D/F / STPR1220D/F

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

Symbol	Tests Conditions		Min.	Typ.	Max.	Unit
I_R *	$T_j = 25^\circ C$	$V_R = V_{RRM}$			50	μA
	$T_j = 100^\circ C$				0.8	mA
V_F **	$T_j = 125^\circ C$	$I_F = 12 A$			0.99	V
	$T_j = 125^\circ C$	$I_F = 24 A$			1.20	
	$T_j = 25^\circ C$	$I_F = 24 A$			1.25	

Pulse test : * $t_p = 5 \text{ ms}$, duty cycle < 2 %
** $t_p = 380 \mu\text{s}$, duty cycle < 2 %

RECOVERY CHARACTERISTICS

Symbol	Tests Conditions			Min.	Typ.	Max.	Unit	
trr	$T_j = 25^\circ C$	$I_F = 0.5 A$	$I_R = 1A$	$I_{rr} = 0.25 A$			30	ns
tfr	$T_j = 25^\circ C$	$I_F = 1 A$	$tr = 10 \text{ ns}$	$V_{FR} = 1.1 \times V_F$		20		ns
V_{FP}	$T_j = 25^\circ C$	$I_F = 1 A$	$tr = 10 \text{ ns}$			3		V

To evaluate the conduction losses use the following equation:
 $P = 0.78 \times I_F(AV) + 0.0175 I_F^2(\text{RMS})$

Fig.1 : Average forward power dissipation versus average forward current.

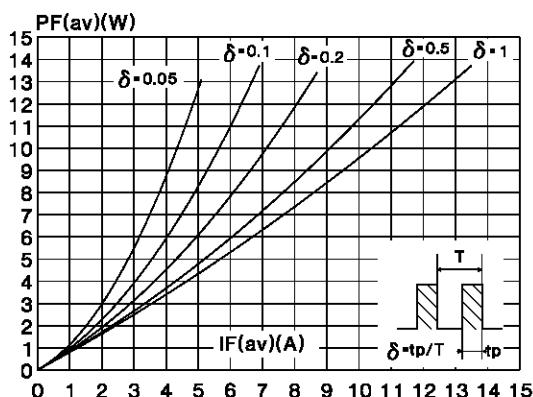


Fig.2 : Peak current versus form factor.

