

TIP47G, TIP48G, TIP50G

High Voltage NPN Silicon Power Transistors

This series is designed for line operated audio output amplifier, SWITCHMODE™ power supply drivers and other switching applications.

Features

- 250 V to 400 V (Min) – $V_{CEO(sus)}$
- 1 A Rated Collector Current
- Popular TO-220 Plastic Package
- These Devices are Pb-Free and are RoHS Compliant*

MAXIMUM RATINGS

Rating	Symbol	TIP47	TIP48	TIP50	Unit
Collector – Emitter Voltage	V_{CEO}	250	300	400	Vdc
Collector – Base Voltage	V_{CB}	350	400	500	Vdc
Emitter – Base Voltage	V_{EB}		5.0		Vdc
Collector Current – Continuous – Peak	I_C		1.0 2.0		Adc
Base Current	I_B		0.6		Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D		40 0.32		W W/ $^\circ\text{C}$
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D		2.0 0.016		W W/ $^\circ\text{C}$
Unclamped Inducting Load Energy (See Figure 8)	E		20		mJ
Operating and Storage Junction Temperature Range	T_J, T_{stg}		-65 to +150		$^\circ\text{C}$


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	3.125	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62.5	$^\circ\text{C/W}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.



**1.0 AMPERE
POWER TRANSISTORS
NPN SILICON
250–300–400 VOLTS
40 WATTS**

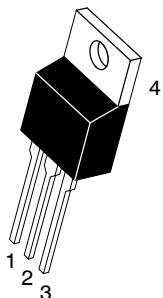

TO-220AB
CASE 221A
STYLE 1



MARKING DIAGRAM

TIPxx = Device Code
xx = 47, 48, or 50
A = Assembly Location
Y = Year
WW = Work Week
G = Pb-Free Package

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

TIP47G, TIP48G, TIP50G

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (Note 1) ($I_C = 30 \text{ mA}_\text{dc}$, $I_B = 0$)	TIP47 TIP48 TIP50	$V_{\text{CEO}(\text{sus})}$	250 300 400	– – –
Collector Cutoff Current ($V_{\text{CE}} = 150 \text{ V}_\text{dc}$, $I_B = 0$) ($V_{\text{CE}} = 200 \text{ V}_\text{dc}$, $I_B = 0$) ($V_{\text{CE}} = 300 \text{ V}_\text{dc}$, $I_B = 0$)	TIP47 TIP48 TIP50	I_{CEO}	– – –	mA_dc
Collector Cutoff Current ($V_{\text{CE}} = 350 \text{ V}_\text{dc}$, $V_{\text{BE}} = 0$) ($V_{\text{CE}} = 400 \text{ V}_\text{dc}$, $V_{\text{BE}} = 0$) ($V_{\text{CE}} = 500 \text{ V}_\text{dc}$, $V_{\text{BE}} = 0$)	TIP47 TIP48 TIP50	I_{CES}	– – –	mA_dc
Emitter Cutoff Current ($V_{\text{BE}} = 5.0 \text{ V}_\text{dc}$, $I_C = 0$)		I_{EBO}	–	1.0
ON CHARACTERISTICS (Note 1)				
DC Current Gain ($I_C = 0.3 \text{ Adc}$, $V_{\text{CE}} = 10 \text{ V}_\text{dc}$) ($I_C = 1.0 \text{ Adc}$, $V_{\text{CE}} = 10 \text{ V}_\text{dc}$)		h_{FE}	30 10	150 –
Collector-Emitter Saturation Voltage ($I_C = 1.0 \text{ Adc}$, $I_B = 0.2 \text{ Adc}$)		$V_{\text{CE}(\text{sat})}$	–	1.0
Base-Emitter On Voltage ($I_C = 1.0 \text{ Adc}$, $V_{\text{CE}} = 10 \text{ V}_\text{dc}$)		$V_{\text{BE}(\text{on})}$	–	1.5
DYNAMIC CHARACTERISTICS				
Current-Gain – Bandwidth Product ($I_C = 0.1 \text{ Adc}$, $V_{\text{CE}} = 10 \text{ V}_\text{dc}$, $f = 2.0 \text{ MHz}$)		f_T	10	–
Small-Signal Current Gain ($I_C = 0.2 \text{ Adc}$, $V_{\text{CE}} = 10 \text{ V}_\text{dc}$, $f = 1.0 \text{ kHz}$)		h_{fe}	25	–

1. Pulse Test: Pulse width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$.

ORDERING INFORMATION

Device	Package	Shipping
TIP47	TO-220	50 Units / Rail
TIP47G	TO-220 (Pb-Free)	50 Units / Rail
TIP48	TO-220	50 Units / Rail
TIP48G	TO-220 (Pb-Free)	50 Units / Rail
TIP49	TO-220	50 Units / Rail
TIP49G	TO-220 (Pb-Free)	50 Units / Rail
TIP50	TO-220	50 Units / Rail
TIP50G	TO-220 (Pb-Free)	50 Units / Rail

TIP47G, TIP48G, TIP50G


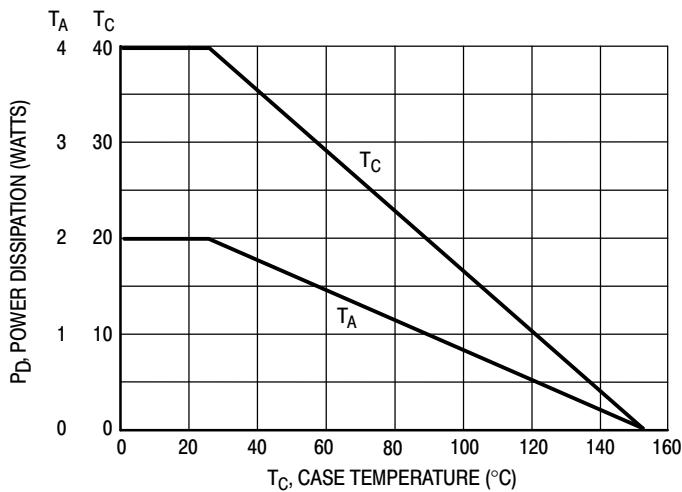


Figure 1. Power Derating

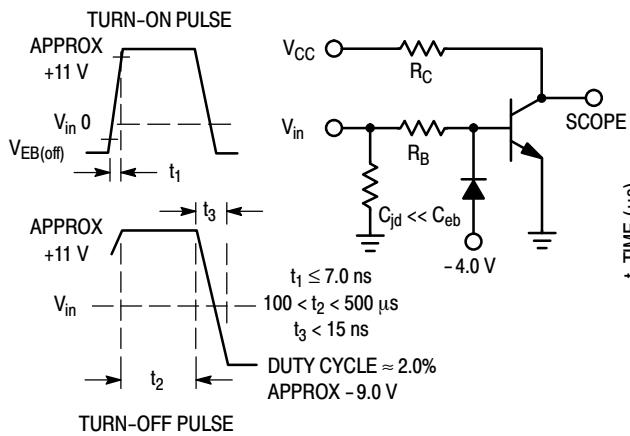

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS.

Figure 2. Switching Time Equivalent Circuit

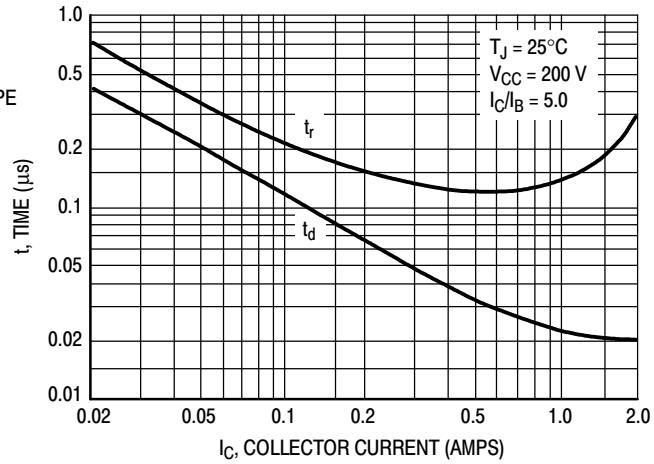


Figure 3. Turn-On Time

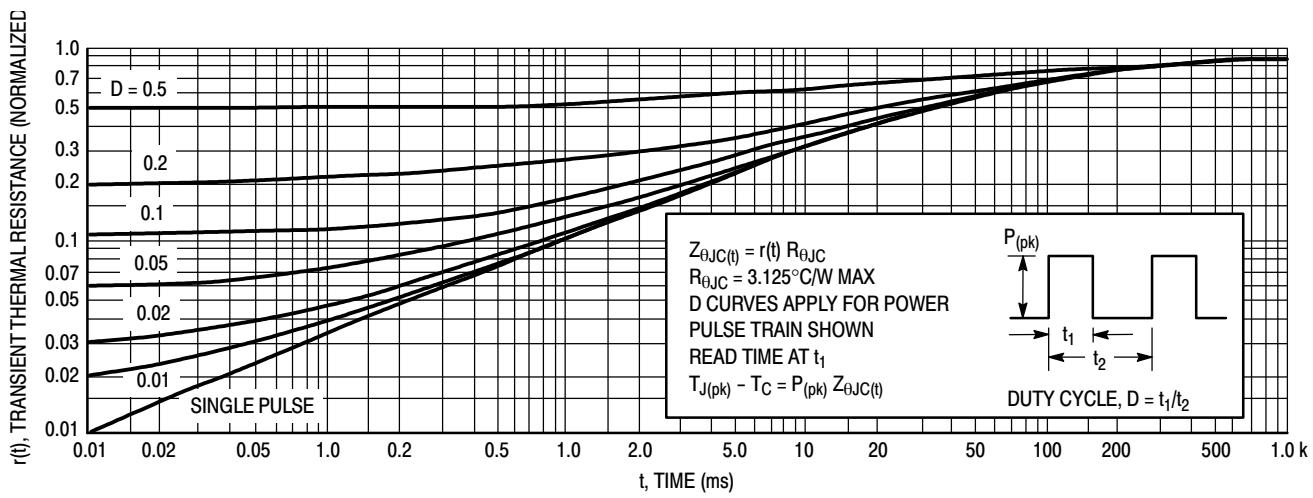


Figure 4. Thermal Response

TIP47G, TIP48G, TIP50G

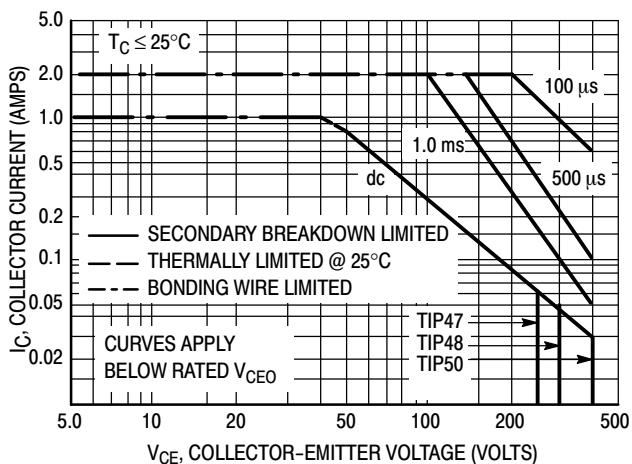


Figure 5. Active Region Safe Operating Area

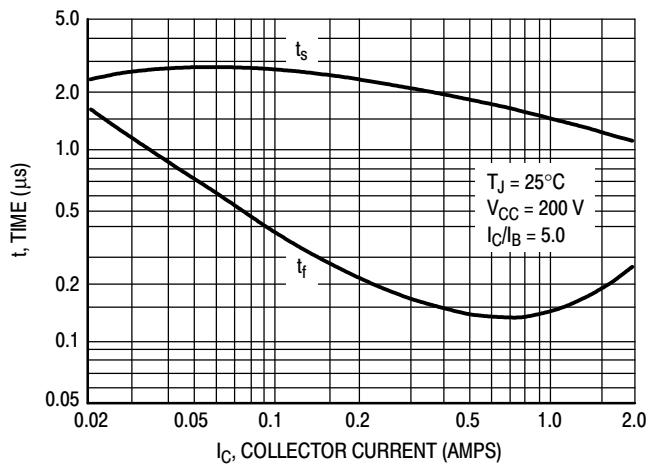


Figure 6. Turn-Off Time


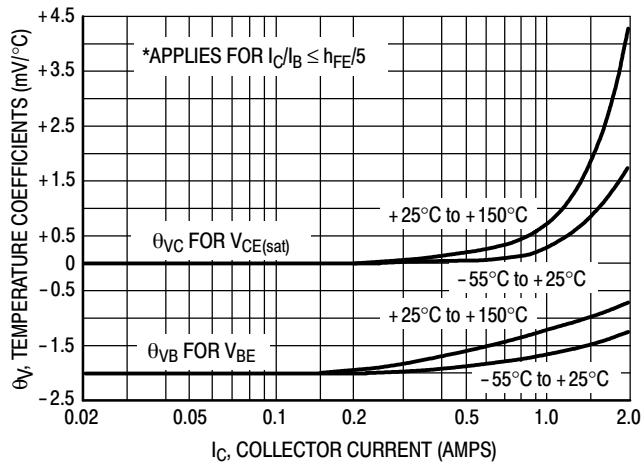


Figure 7. Temperature Coefficients

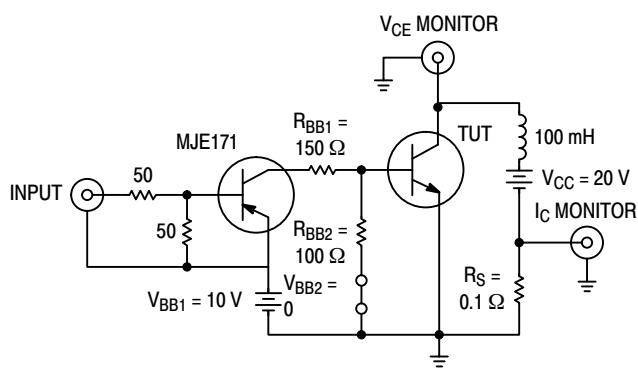

Note A: Input pulse width is increased until $I_{CM} = 0.63 \text{ A}$.

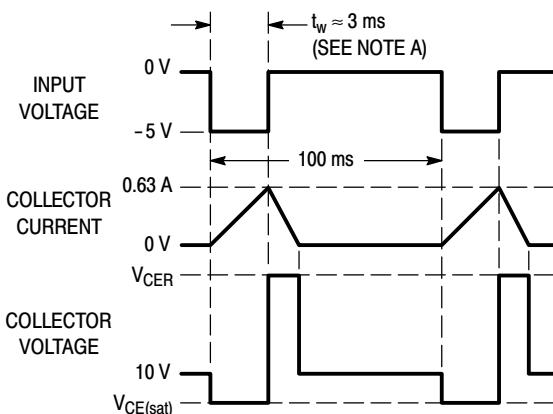


Figure 8. Inductive Load Switching