


NPN Transistors

MMBTH10

■ Features

- Collector Current Capability $I_c=0.05A$
- Collector Emitter Voltage $V_{CE0}=25V$

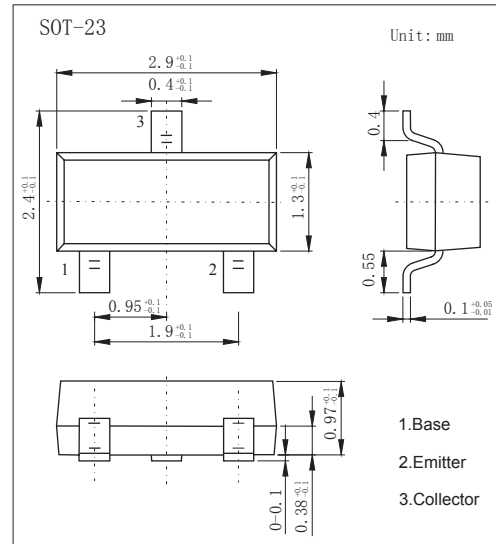

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CBO}	30	V
Collector - Emitter Voltage	V_{CEO}	25	
Emitter - Base Voltage	V_{EBO}	3	
Collector Current - Continuous	I_c	0.05	A
Collector Power Dissipation	P_c	225	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	556	$^\circ C/W$
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 to +150	

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CBO}	$I_c= 100 \mu A, I_E= 0$	30			V
Collector- emitter breakdown voltage	V_{CEO}	$I_c= 1 mA, I_B= 0$	25			
Emitter - base breakdown voltage	V_{EBO}	$I_E= 10 \mu A, I_C= 0$	3			
Collector-base cut-off current	I_{CBO}	$V_{CB}=25 V, I_E= 0$			100	nA
Emitter cut-off current	I_{EBO}	$V_{EB}= 2V, I_C=0$			100	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_c=4 mA, I_B=0.4mA$			0.5	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_c=4 mA, I_B=0.4mA$			1.2	
Base - emitter saturation voltage	V_{BE}	$V_{CE}=10V, I_c= 4 mA$			0.95	
DC current gain	h_{FE}	$V_{CE}= 10V, I_c= 4mA$	60			
Collector output capacitance	C_{ob}	$V_{CB}= 10V, I_E= 0, f=1MHz$			0.7	pF
Transition frequency	f_t	$V_{CE}= 10V, I_c= 4mA, f=100MHz$	650			MHz







■ Classification of h_{fe}

Marking	3EM
---------	-----

NPN Transistors

MMBTH10

Typical Characteristics

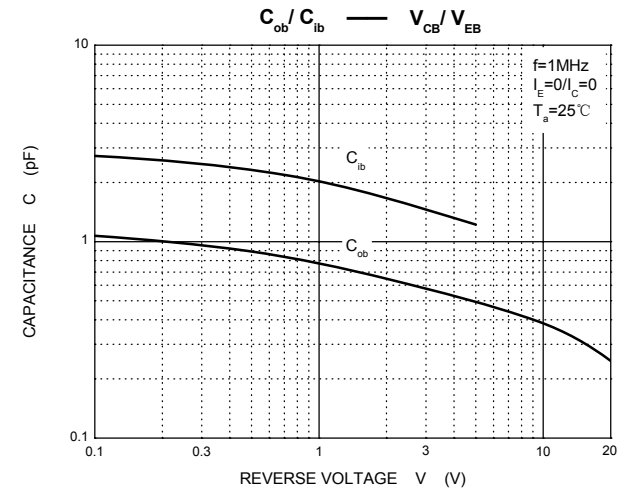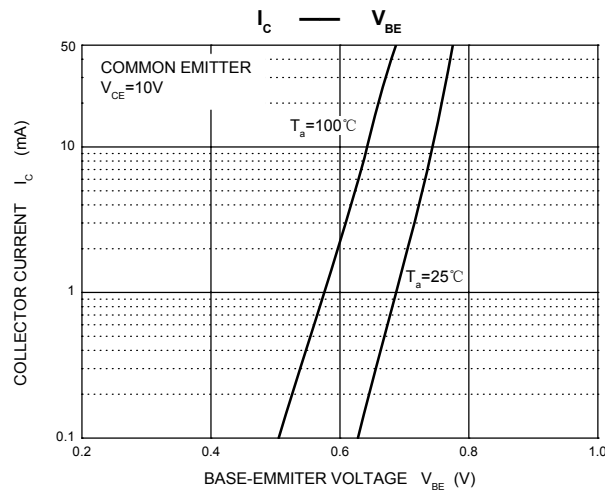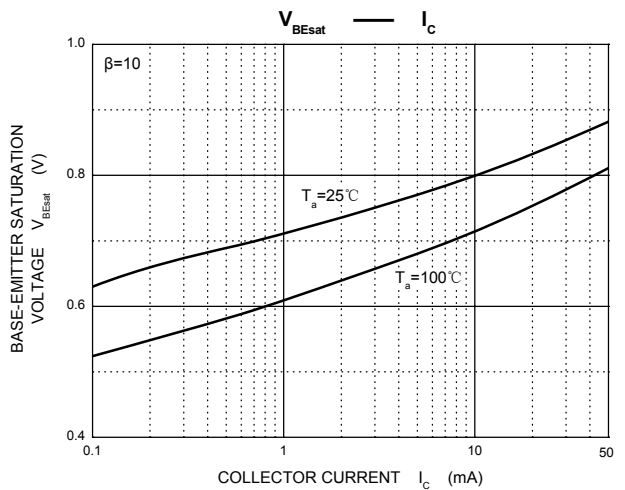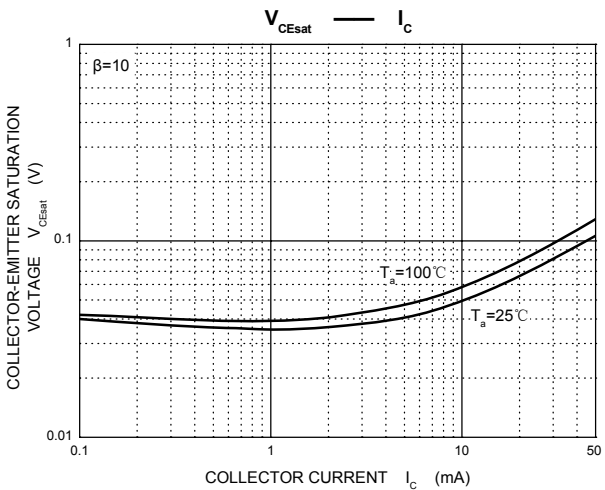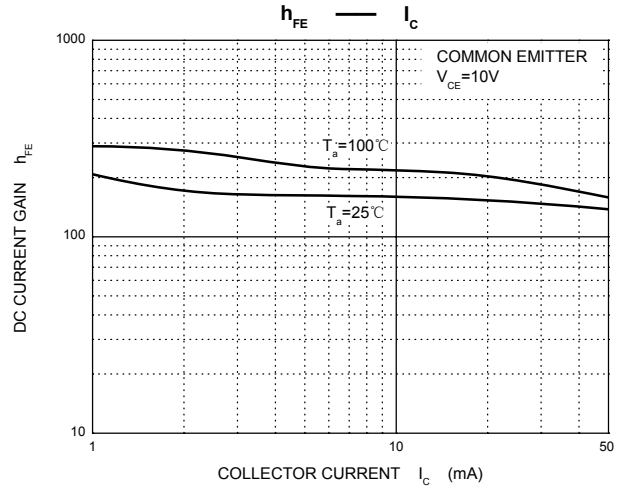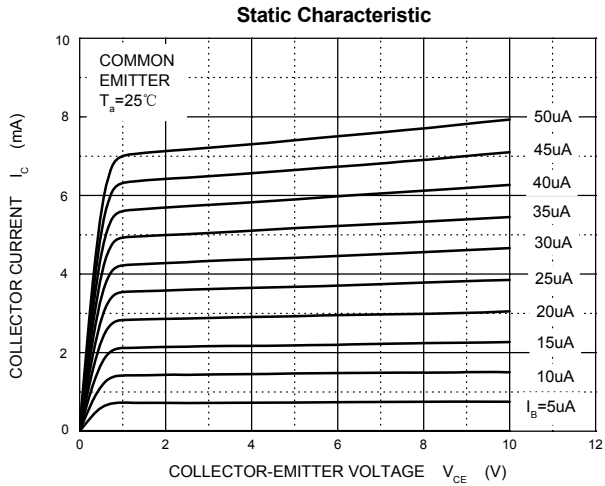

NPN Transistors

MMBTH10

■ Typical Characteristics

