



79L12 Negative-Voltage Regulators

- 3-Terminal Regulators
- Output Current Up to 100 mA
- No External Components Required
- Internal Thermal-Overload Protection
- Internal Short-Circuit Current Limiting
- Direct Replacement for Motorola MC79L12 Series



description

This series of fixed negative-voltage integrated-circuit voltage regulators is designed for a wide range of applications. These include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used to control series pass elements to make high-current voltage-regulator circuits. One of these regulators can deliver up to 100 mA of output current. The internal current-limiting and thermal-shutdown features make them essentially immune to overload. When used as a replacement for a zener-diode and resistor combination, these devices can provide effective improvement in output impedance of two orders of magnitude, with lower bias current.


electrical characteristics at specified virtual junction temperature, $V_I = -19V$, $I_O = 40mA$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T ‡	79L12			UNIT
			MIN	TYP	MAX	
Output voltage		25°C	-11.5	-5	-12.5	V
	$I_O = 1mA \text{ to } 40mA, V_I = -14.5V \text{ to } -27V$	Full range	-11.4		-12.5	
	$I_O = 1mA \text{ to } 70mA$	Full range	-11.4		-12.5	
Input voltage regulation	$V_I = -14.5V \text{ to } -27V$	25°C		50	250	mV
	$V_I = -16V \text{ to } -27V$			40	200	
Ripple rejection	$V_I = 15V \text{ to } -25V, f = 120Hz$	25°C	37	42		dB
Output voltage regulation	$I_O = 1mA \text{ to } 100mA$	25°C		24	60	mV
	$I_O = 1mA \text{ to } 40mA$			15	30	
Output noise voltage	$f = 10Hz \text{ to } 100kHz$	25°C		80		µV
Dropout voltage		25°C		1.7		V
Bias current		25°C			6.5	mA
		125°C			6	
Bias current change	$V_I = -16V \text{ to } -27V$	Full range			1.5	mA
	$I_O = 1mA \text{ to } 40mA$				0.1	

‡ Pulse-testing techniques maintain T_J as close to T_A as possible. Thermal effects must be taken into account separately. All characteristics are measured with a 0.33-µF capacitor across the input and a 0.1-µF capacitor across the output. Full range for the 79L12 is $T_J = 0°C \text{ to } 70°C$

79L12

equivalent schematic

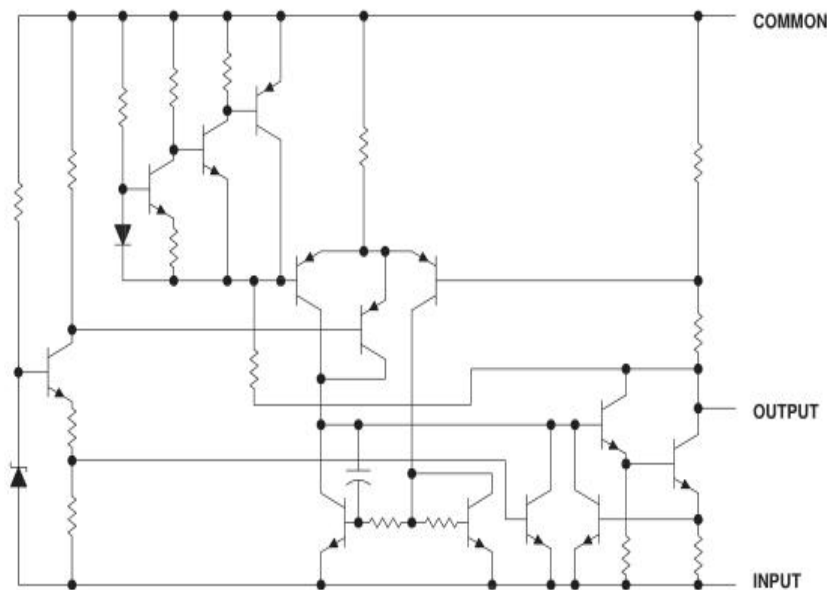

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Input voltage: 79L12	-35V
Operating free-air, case, or virtual junction temperature	150 °C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, T _{stg}	-65°C to 150°C

recommended operating conditions

79L12	MIN	MAX	UNIT
Input voltage, V _I	-14.5	-27	V
Output current, I _O		100	mA
Operating virtual junction temperature, T _J	0	70	°C