STP9NK80Z
STF9NK80Z

N-CHANNEL 800V -0.9Ω - 7.5A TO-220/TO-220FP
Zener-Protected SuperMESH™MOSFET

Table 1: General Features

TYPE	V_{DSS}	$R_{DS(on)}$	I_D	Pw
STP9NK80Z	800 V	<1.2 Ω	7.5 A	150 W
STF9NK80Z	800 V	<1.2 Ω	7.5 A	35 W

- TYPICAL R_{DS}(on) = 0.9Ω
- EXTREMELY HIGH dv/dt CAPABILITY
- IMPROVED ESD CAPABILITY
- 100% AVALANCHE RATED
- GATE CHARGE MINIMIZED
- VERY LOW INTRINSIC CAPACITANCES
- VERY GOOD MANUFACTURING REPEATIBILITY

Figure 1: Package

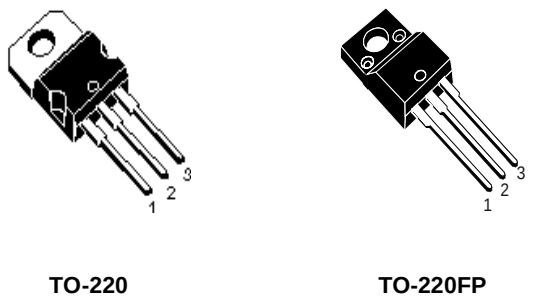

DESCRIPTION

The SuperMESH™ series is obtained through an extreme optimization of ST's well established strip-based PowerMESH™ layout. In addition to pushing on-resistance significantly down, special care is taken to ensure a very good dv/dt capability for the most demanding applications. Such series complements ST full range of high voltage MOS-FETs including revolutionary MDmesh™ products.

APPLICATIONS

- HIGH CURRENT, HIGH SPEED SWITCHING
- IDEAL FOR OFF-LINE POWER SUPPLIES
- SMPS

Figure 2: Internal Schematic Diagram

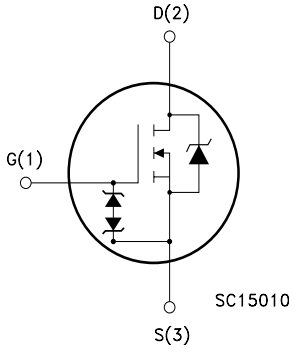

Table 2: Order Codes

SALES TYPE	MARKING	PACKAGE	PACKAGING
STP9NK80Z	P9NK80Z	TO-220	TUBE
STF9NK80Z	F9NK80Z	TO-220FP	TUBE

Table 3: Absolute Maximum ratings

Symbol	Parameter	Value		Unit
		TO-220	TO-220FP	
V_{DS}	Drain-source Voltage (V_{GS} = 0)	800		V
V_{DGR}	Drain-gate Voltage (R_{GS} = 20 kΩ)	800		V
V_{GS}	Gate- source Voltage	± 30		V
I_D	Drain Current (continuous) at T_C = 25°C	7.5	7.5 (*)	A
I_D	Drain Current (continuous) at T_C = 100°C	4.7	4.7 (*)	A
I_{DM} (•)	Drain Current (pulsed)	30	30 (*)	A
P_{TOT}	Total Dissipation at T_C = 25°C	150	35	W
	Derating Factor	1.20	0.28	W/°C
$V_{ESD(G-S)}$	Gate source ESD(HBM-C=100pF, R=1.5KΩ)	4000		V
dv/dt (1)	Peak Diode Recovery voltage slope	4.5		V/ns
V_{ISO}	Insulation Withstand Voltage (DC)	-	2500	V
T_j T_{stg}	Operating Junction Temperature Storage Temperature	-55 to 150 -55 to 150		°C °C

(●) Pulse width limited by safe operating area
(1) I_{SD} ≤7.5A, di/dt ≤200A/µs, V_{DD} = 80% $V_{(BR)DSS}$
(*) Limited only by maximum temperature allowed

Table 4: Thermal Data

		TO-220	TO-220FP	
Rthj-case	Thermal Resistance Junction-case Max	0.83	3.6	°C/W
Rthj-amb	Thermal Resistance Junction-ambient Max	62.5		°C/W
T_l	Maximum Lead Temperature For Soldering Purpose	350		°C

Table 5: Avalanche Characteristics

Symbol	Parameter	Max Value	Unit
I_{AR}	Avalanche Current, Repetitive or Not-Repetitive (pulse width limited by T_j max)	7.5	A
E_{AS}	Single Pulse Avalanche Energy (starting T_j = 25 °C, I_D = I_{AR}, V_{DD} = 50 V)	350	mJ

Table 6: Gate-Source Zener Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV_{GSO}	Gate-Source Breakdown Voltage	Igs=± 1mA (Open Drain)	30			V

PROTECTION FEATURES OF GATE-TO-SOURCE ZENER DIODES

The built-in back-to-back Zener diodes have specifically been designed to enhance not only the device's ESD capability, but also to make them safely absorb possible voltage transients that may occasionally be applied from gate to source. In this respect the Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.

ELECTRICAL CHARACTERISTICS (T_{CASE} =25°C UNLESS OTHERWISE SPECIFIED)

Table 7: On/Off

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source Breakdown Voltage	I_D = 1 mA, V_{GS} = 0	800			V
I_{DSS}	Zero Gate Voltage Drain Current (V_{GS} = 0)	V_{DS} = Max Rating V_{DS} = Max Rating, T_C = 125 °C			1 50	µA µA
I_{GSS}	Gate-body Leakage Current (V_{DS} = 0)	V_{GS} = ± 20V			±10	µA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 100µA	3	3.75	4.5	V
$R_{DS(on)}$	Static Drain-source On Resistance	V_{GS} = 10V, I_D = 3.75 A		0.9	1.2	Ω

Table 8: DYNAMIC

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
g_{fs} (1)	Forward Transconductance	V_{DS} = 15 V, I_D = 3.75 A		7.5		S
C_{iss} C_{oss} C_{rss}	Input Capacitance Output Capacitance Reverse Transfer Capacitance	V_{DS} = 25V, f = 1 MHz, V_{GS} = 0		1900 180 38		pF pF pF
$C_{oss\ eq.}$ (3)	Equivalent Output Capacitance	V_{GS} = 0V, V_{DS} = 0V to 640V		75		pF
$t_{d(on)}$ t_r $t_{d(off)}$ t_f	Turn-on Delay Time Rise Time Turn-off Delay Time Fall Time	V_{DD} = 400 V, I_D = 3.75 A R_G = 4.7Ω V_{GS} = 10 V (see Figure 19)		26 19 58 18		ns ns ns ns
$t_{r(Voff)}$ t_f t_c	Off-voltage Rise Time Fall Time Cross-over Time	V_{DD} = 640 V, I_D = 7.5A, R_G = 4.7Ω, V_{GS} = 10V (see Figure 20)		12 10 24		ns ns ns
Q_g Q_{gs} Q_{gd}	Total Gate Charge Gate-Source Charge Gate-Drain Charge	V_{DD} = 640V, I_D = 7.5 A, V_{GS} = 10V (see Figure 22)		60 12 35	84	nC nC nC

Table 9: Source Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{SD} I_{SDM} (2)	Source-drain Current Source-drain Current (pulsed)				7.5 30	A A
V_{SD} (1)	Forward On Voltage	I_{SD} = 7.5 A, V_{GS} = 0			1.6	V
t_{rr} Q_{rr} I_{RRM}	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	I_{SD} = 7.5 A, di/dt = 100A/µs V_{DD} = 35V, T_j = 25°C (see Figure 20)		530 4.5 17		ns µC A
t_{rr} Q_{rr} I_{RRM}	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	I_{SD} = 7.5 A, di/dt = 100A/µs V_{DD} = 35V, T_j = 150°C (see Figure 20)		690 6.4 17		ns µC A

Note: 1. Pulsed: Pulse duration = 300 µs, duty cycle 1.5 %.
2. Pulse width limited by safe operating area.
3. $C_{oss\ eq.}$ is defined as a constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS}.

Figure 3: Safe Operating Area for TO-220

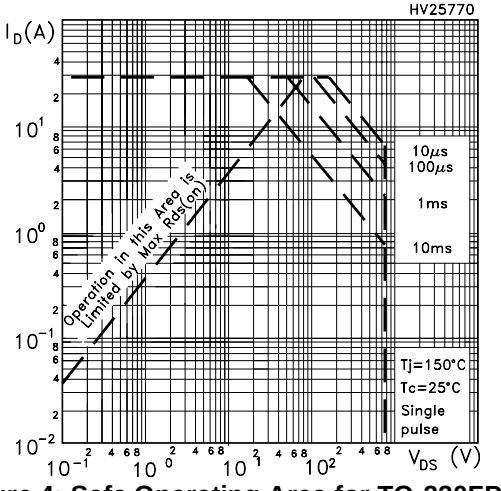

Figure 4: Safe Operating Area for TO-220FP

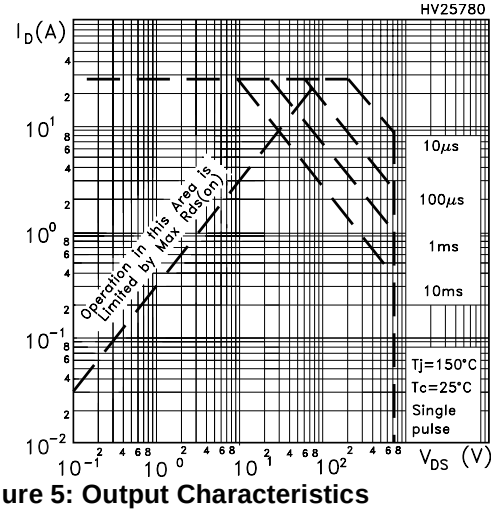

Figure 5: Output Characteristics

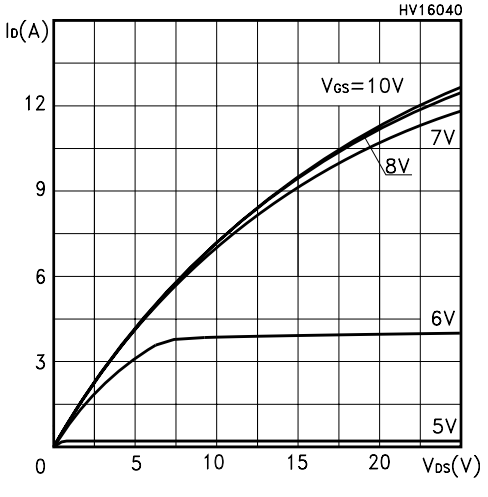

Figure 6: Thermal Impedance for TO-220

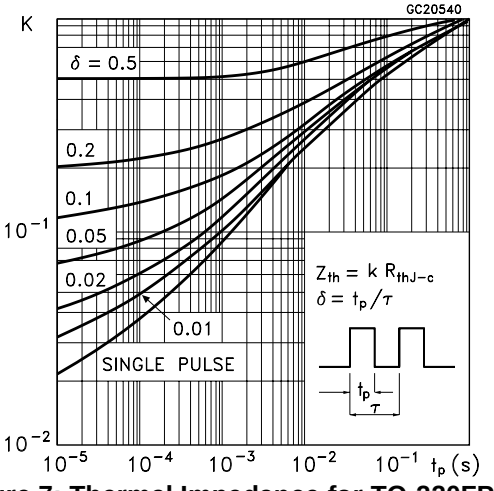

Figure 7: Thermal Impedance for TO-220FP

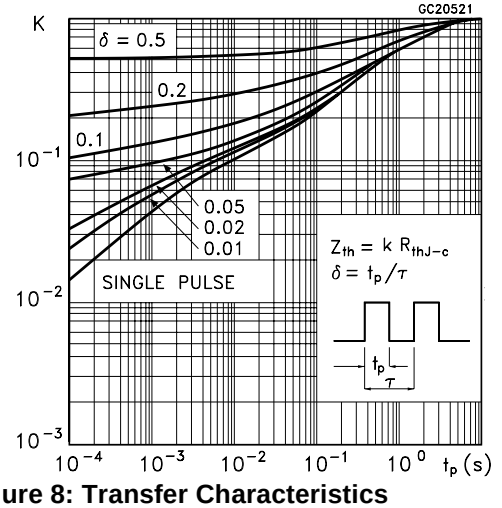
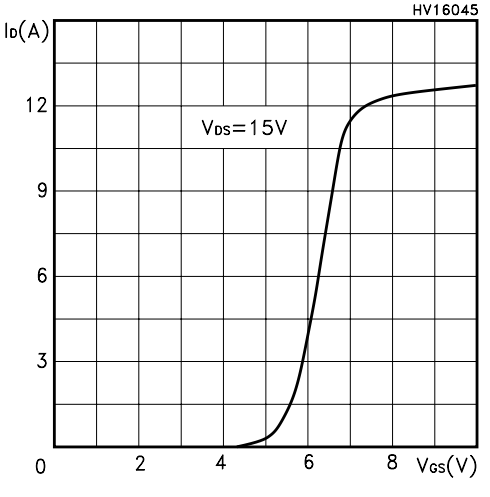
Figure 8: Transfer Characteristics