

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MAIN PRODUCT CHARACTERISTICS


$I_{F(AV)}$	2 x 8 A
V_{RRM}	100 V
$T_j(\text{max})$	175 °C
$V_F(\text{max})$	0.64 V

FEATURES AND BENEFITS

- NEGLIGIBLE SWITCHING LOSSES
- HIGH JUNCTION TEMPERATURE CAPABILITY
- LOW LEAKAGE CURRENT
- GOOD TRADE OFF BETWEEN LEAKAGE CURRENT AND FORWARD VOLTAGE DROP
- AVALANCHE CAPABILITY SPECIFIED

DESCRIPTION

Dual center tap Schottky rectifier designed for high frequency miniature Switch Mode Power Supplies such as adaptors and on board DC/DC converters.

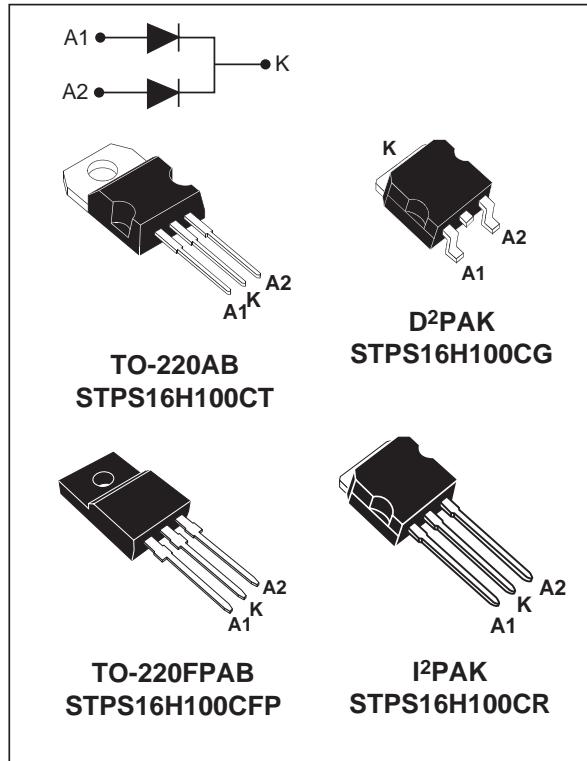

ABSOLUTE RATINGS (limiting values, per diode)

Symbol	Parameter				Value	Unit
V_{RRM}	Repetitive peak reverse voltage				100	V
$I_{F(\text{RMS})}$	RMS forward current				30	A
$I_{F(AV)}$	Average forward current $\delta = 0.5$	TO-220AB	$T_c = 165^\circ\text{C}$	Per diode	8	A
		D ² PAK / I ² PAK			16	
I_{FSM}	Surge non repetitive forward current	TO-220FPAB	$T_c = 150^\circ\text{C}$	Per device	200	A
I_{RRM}	Repetitive peak reverse current				1	A
I_{RSM}	Non repetitive peak reverse current		tp = 100 μs square		2	A
P_{ARM}	Repetitive peak avalanche power		tp = 1 μs	$T_j = 25^\circ\text{C}$	8700	W
T_{stg}	Storage temperature range				-65 to +175	$^\circ\text{C}$
T_j	Maximum operating junction temperature *				175	$^\circ\text{C}$
dV/dt	Critical rate of rise of reverse voltage				10000	V/ μs

* : $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th}(j - a)}$ thermal runaway condition for a diode on its own heatsink

STPS16H100CT/CG/CFP/CR

THERMAL RESISTANCES

Symbol	Parameter			Value	Unit
$R_{th(j-c)}$	Junction to ambient	TO-220AB / D ² PAK / I ² PAK	Per diode	1.6	°C/W
		TO-220FPAB		4	
	TO-220AB / D ² PAK / I ² PAK	Total	1.1	°C/W	
				3.5	
$R_{th(c)}$		TO-220AB / D ² PAK / I ² PAK	Coupling	0.6	°C/W
		TO-220FPAB		3	

When the diodes 1 and 2 are used simultaneously :

$$\Delta T_j(\text{diode 1}) = P(\text{diode 1}) \times R_{th(j-c)}(\text{Per diode}) + P(\text{diode 2}) \times R_{th(c)}$$

STATIC ELECTRICAL CHARACTERISTICS (per diode)

Symbol	Parameter	Tests Conditions		Min.	Typ.	Max.	Unit
I_R *	Reverse leakage Current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			3.6	μA
		$T_j = 125^\circ\text{C}$			1.6	5	mA
V_F **	Forward Voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 8 \text{ A}$			0.77	V
		$T_j = 125^\circ\text{C}$	$I_F = 8 \text{ A}$		0.59	0.64	
		$T_j = 25^\circ\text{C}$	$I_F = 16 \text{ A}$			0.88	
		$T_j = 125^\circ\text{C}$	$I_F = 16 \text{ A}$		0.67	0.73	

Pulse test : * $t_p = 5 \text{ ms}, \delta < 2\%$

** $t_p = 380 \mu\text{s}, \delta < 2\%$

To evaluate the conduction losses use the following equation :

$$P = 0.55 \times I_{F(AV)} + 0.011 \times I_F^2(\text{RMS})$$

Fig. 1: Conduction losses versus average current.


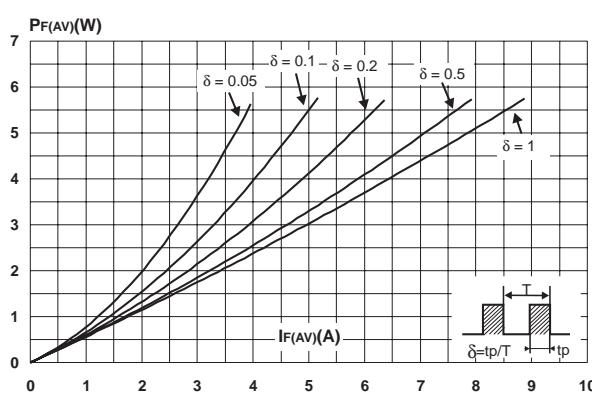


Fig. 2: Average forward current versus ambient temperature ($\delta=0.5$).

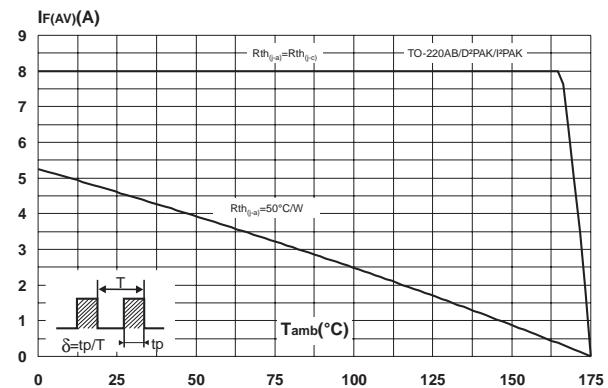

PACKAGE MECHANICAL DATA
TO-220AB

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
C	1.23	1.32	0.048	0.051
D	2.40	2.72	0.094	0.107
E	0.49	0.70	0.019	0.027
F	0.61	0.88	0.024	0.034
F1	1.14	1.70	0.044	0.066
F2	1.14	1.70	0.044	0.066
G	4.95	5.15	0.194	0.202
G1	2.40	2.70	0.094	0.106
H2	10	10.40	0.393	0.409
L2	16.4 typ.		0.645 typ.	
L4	13	14	0.511	0.551
L5	2.65	2.95	0.104	0.116
L6	15.25	15.75	0.600	0.620
L7	6.20	6.60	0.244	0.259
L9	3.50	3.93	0.137	0.154
M	2.6 typ.		0.102 typ.	
Diam.	3.75	3.85	0.147	0.151

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS16H100CT	STPS16H100CT	TO-220AB	2.20 g	50	Tube
STPS16H100CFP	STPS16H100CFP	TO-220FPAB	2.0 g	50	Tube
STPS16H100CG	STPS16H100CG	D ² PAK	1.48 g	50	Tube
STPS16H100CG-TR	STPS16H100CG	D ² PAK	1.48 g	1000	Tape & reel
STPS16H100CR	STPS16H100CR	I ² PAK	1.9 g	50	Tube

- EPOXY MEETS UL94,V0