

LOW DROP POWER SCHOTTKY RECTIFIER

MAJOR PRODUCTS CHARACTERISTICS

I_{F(AV)}	2 x 10 A
V_{RRM}	30 V
T_j (max)	150°C
V_F (max)	0.40 V

FEATURES AND BENEFITS

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- EXTREMELY FAST SWITCHING
- LOW FORWARD VOLTAGE DROP FOR HIGHER EFFICIENCY
- LOW THERMAL RESISTANCE
- AVALANCHE CAPABILITY SPECIFIED

DESCRIPTION


Dual Schottky rectifier suited for switch Mode Power Supply and high frequency DC to DC converters.

Packaged in TO-220AB, D²PAK and I²PAK, this device is intended for use in low voltage high frequency inverters, free wheeling and polarity protection applications.

ABSOLUTE RATINGS (limiting values, per diode)

Symbol	Parameter			Value	Unit
V _{RRM}	Repetitive peak reverse voltage			30	V
I _{F(RMS)}	RMS forward current			30	A
I _{F(AV)}	Average forward current	T _c = 140°C δ = 0.5	Per diode Per device	10 20	A
I _{FSM}	Surge non repetitive forward current	tp = 10 ms Sinusoidal		180	A
I _{RRM}	Peak repetitive reverse current	tp=2 μs square F=1kHz		1	A
I _{RSR}	Non repetitive peak reverse current	tp = 100 μs square		2	A
P _{ARM}	Repetitive peak avalanche power	tp = 1μs T _j = 25°C		3000	W
T _{stg}	Storage temperature range			- 65 to + 150	°C
T _j	Maximum operating junction temperature *			150	°C
dV/dt	Critical rate of rise of reverse voltage (rated V _R , T _j = 25°C)			10000	V/μs

* : $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th}(j - a)}$ thermal runaway condition for a diode on its own heatsink

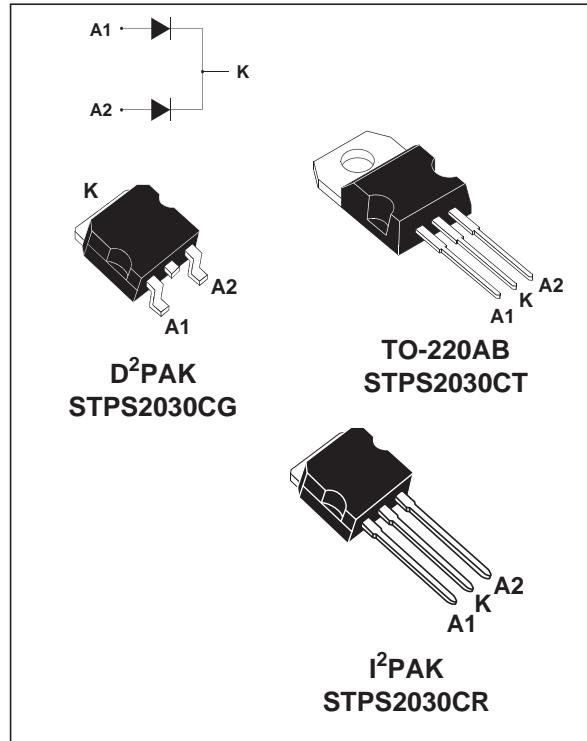

STPS2030CT/CG/CR

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case TO-220AB - D ² PAK - I ² PAK	2.2	°C/W
	Per diode Total	1.3	
$R_{th(c)}$	Coupling	0.3	°C/W

STATIC ELECTRICAL CHARACTERISTICS (per diode)

Symbol	Parameter	Tests Conditions	Min.	Typ.	Max.	Unit
I_R *	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$	0.15	1.0	mA
		$T_j = 125^\circ\text{C}$		80	160	
V_F *	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 10 \text{ A}$	0.44	0.50	V
		$T_j = 125^\circ\text{C}$	$I_F = 10 \text{ A}$	0.34	0.40	
		$T_j = 25^\circ\text{C}$	$I_F = 20 \text{ A}$	0.50	0.58	
		$T_j = 125^\circ\text{C}$	$I_F = 20 \text{ A}$	0.44	0.52	

Pulse test : * $t_p = 380 \mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation :
 $P = 0.28 \times I_{F(AV)} + 0.012 I_F^2(\text{RMS})$

Fig. 1: Conduction losses versus average current.

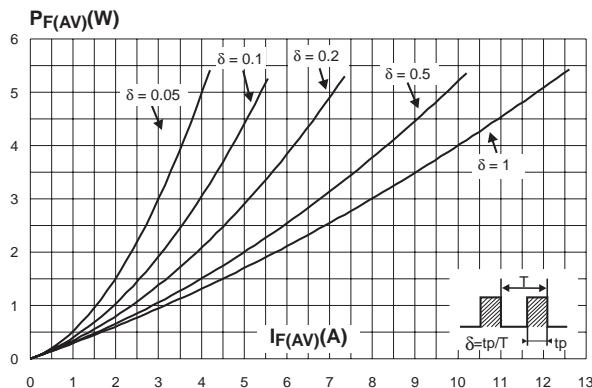


Fig. 3: Normalized avalanche power derating versus pulse duration.

Fig. 2: Average forward current versus ambient temperature($\delta = 0.5$).



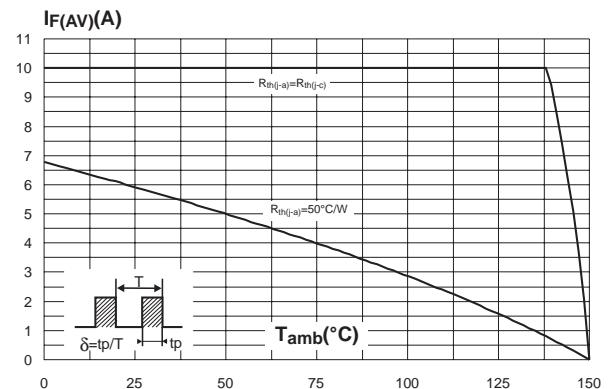


Fig. 4: Normalized avalanche power derating versus junction temperature.

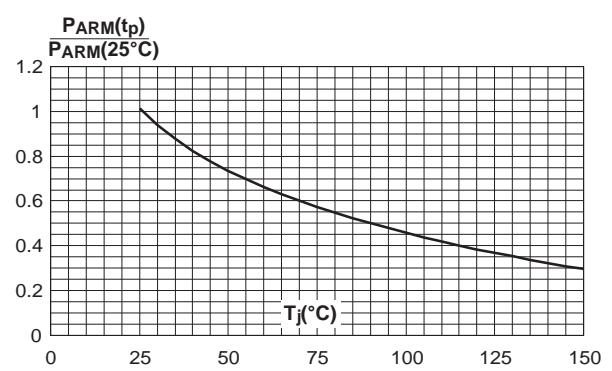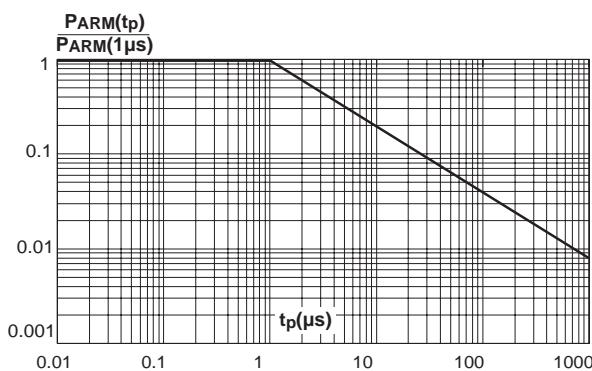

STPS2030CT/CG/CR

PACKAGE MECHANICAL DATA TO-220AB

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
C	1.23	1.32	0.048	0.051
D	2.40	2.72	0.094	0.107
E	0.49	0.70	0.019	0.027
F	0.61	0.88	0.024	0.034
F1	1.14	1.70	0.044	0.066
F2	1.14	1.70	0.044	0.066
G	4.95	5.15	0.194	0.202
G1	2.40	2.70	0.094	0.106
H2	10	10.40	0.393	0.409
L2	16.4 typ.		0.645 typ.	
L4	13	14	0.511	0.551
L5	2.65	2.95	0.104	0.116
L6	15.25	15.75	0.600	0.620
L7	6.20	6.60	0.244	0.259
L9	3.50	3.93	0.137	0.154
M	2.6 typ.		0.102 typ.	
Diam.	3.75	3.85	0.147	0.151

- COOLING METHOD : C
- RECOMMENDED TORQUE VALUE : 0.55 M.N
- MAXIMUM TORQUE VALUE : 0.70 M.N

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS2030CT	STPS2030CT	TO-220AB	2.2 g	50	Tube
STPS2030CG	STPS2030CG	D ² PAK	1.48 g	50	Tube
STPS2030CG-TR	STPS2030CG	D ² PAK	1.48 g	1000	Tape & reel
STPS2030CR	STPS2030CR	I ² PAK	1.49 g	50	Tube

- EPOXY MEETS UL94,V0