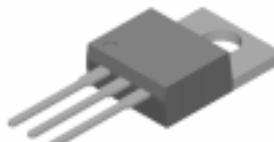
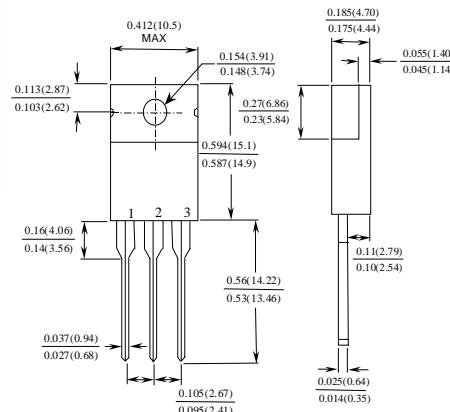


## **MBR2535CT - MBR2560CT**

### **Features**

- Low power loss, high efficiency.
- High surge capacity.
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- Metal silicon junction, majority carrier conduction.
- High current capacity, low forward voltage drop.
- Guard ring for over voltage protection.


**TO-220AB**

PIN 1 →  
PIN 3 →  
CASE  
PIN 2


Dimensions are in: inches (mm)

### **30 Ampere Schottky Barrier Rectifiers**

#### **Absolute Maximum Ratings\***

 $T_A = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Value	Units
$I_o$	Average Rectified Current .375 " lead length @ $T_A = 130^\circ\text{C}$	30	A
$I_f(\text{repetitive})$	Peak Repetitive Forward Current (Rated $V_R$ , Square Wave, 20 KHz) @ $T_A = 130^\circ\text{C}$	30	A
$I_f(\text{surge})$	Peak Forward Surge Current 8.3 ms single half-sine-wave Superimposed on rated load (JEDEC method)	150	A
$P_D$	Total Device Dissipation Derate above $25^\circ\text{C}$	2.0 16.6	mW/ $^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	60	$^\circ\text{C}/\text{W}$
$R_{\theta JL}$	Thermal Resistance, Junction to Lead	1.5	$^\circ\text{C}/\text{W}$
$T_{\text{stg}}$	Storage Temperature Range	-65 to +175	$^\circ\text{C}$
$T_J$	Operating Junction Temperature	-65 to +150	$^\circ\text{C}$

\*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.


#### **Electrical Characteristics**

 $T_A = 25^\circ\text{C}$  unless otherwise noted


Parameter	Device				Units		
	2535CT	2545CT	2550CT	2560CT			
Peak Repetitive Reverse Voltage	35	45	50	60	V		
Maximum RMS Voltage	24	31	35	42	V		
DC Reverse Voltage (Rated $V_R$ )	35	45	50	60	V		
Voltage Rate of Change (Rated $V_R$ )	10,000				V/uS		
Maximum Reverse Current @ rated $V_R$	0.2 40		1.0 50		mA mA		
$T_A = 25^\circ\text{C}$							
$T_A = 125^\circ\text{C}$							
Maximum Forward Voltage $I_F = 15 \text{ A}, T_C = 25^\circ\text{C}$	-		0.75	V			
$I_F = 15 \text{ A}, T_C = 125^\circ\text{C}$	-		0.65	V			
$I_F = 30 \text{ A}, T_C = 25^\circ\text{C}$	0.82		-	V			
$I_F = 30 \text{ A}, T_C = 125^\circ\text{C}$	0.73		-	V			
Peak Repetitive Reverse Surge Current	1.0		0.5	A			
2.0 us Pulse Width, $f = 1.0 \text{ KHz}$							

### Typical Characteristics


**Forward Current Derating Curve**

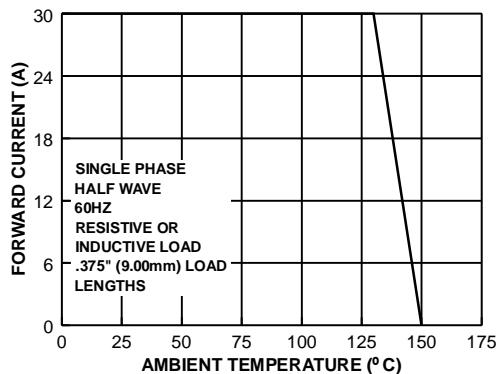


**Non-Repetitive Surge Current**

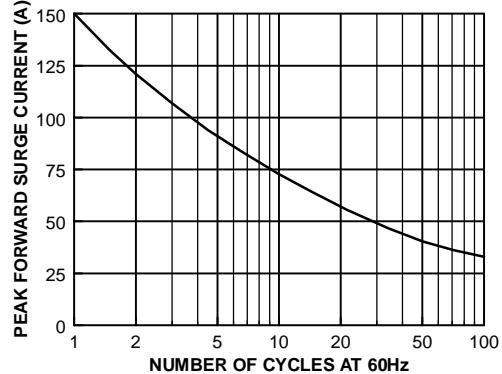


**Forward Characteristics**

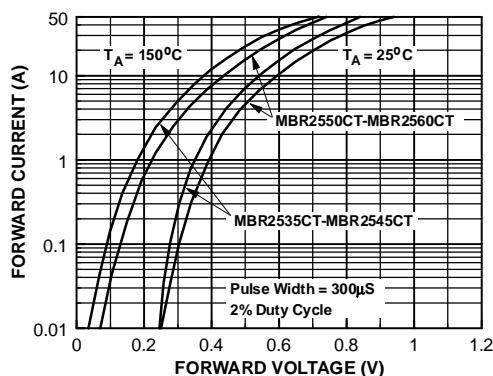

**Reverse Characteristics**

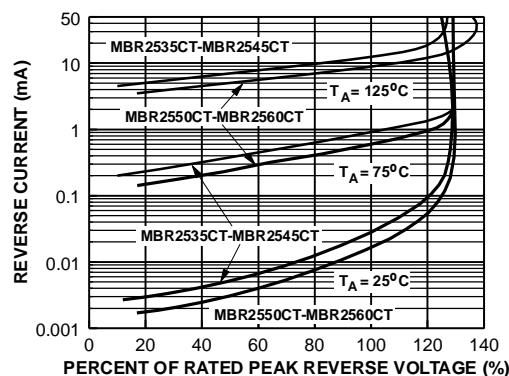

**Typical Junction Capacitance**

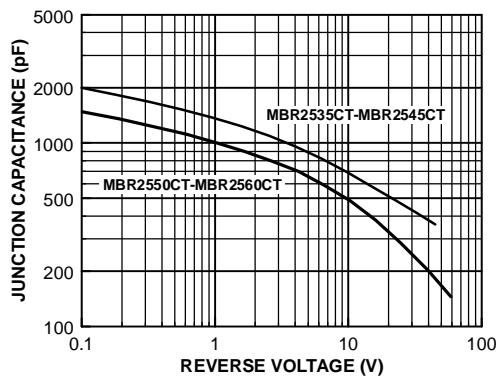

**Transient Thermal Impedance**

