



PFC Device Corporation

**PFR30L60CT**  
**PFR30L60CTF**  
**PFR30L60CTI**  
**PFR30L60CTB**

## 30A 60V MOS Schottky Rectifier

### Major ratings and characteristics


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular Waveform	15 × 2	A
$V_{RRM}$	60	V
$V_F@ 15A, T_J=125^{\circ}C$	0.53	V, typ.
$T_J$ Operating Junction Temperature	-65 to +150	$^{\circ}C$

### Features

- Low Forward Voltage Drop
- Reliable High Temperature Operation
- Softest, fast switching capability
- 150 $^{\circ}C$  Operating Junction Temperature
- Lead Free Finish, RoHS Compliant

### Typical Applications

Device optimized for low forward voltage drop to maximize efficiency in Power Supply applications

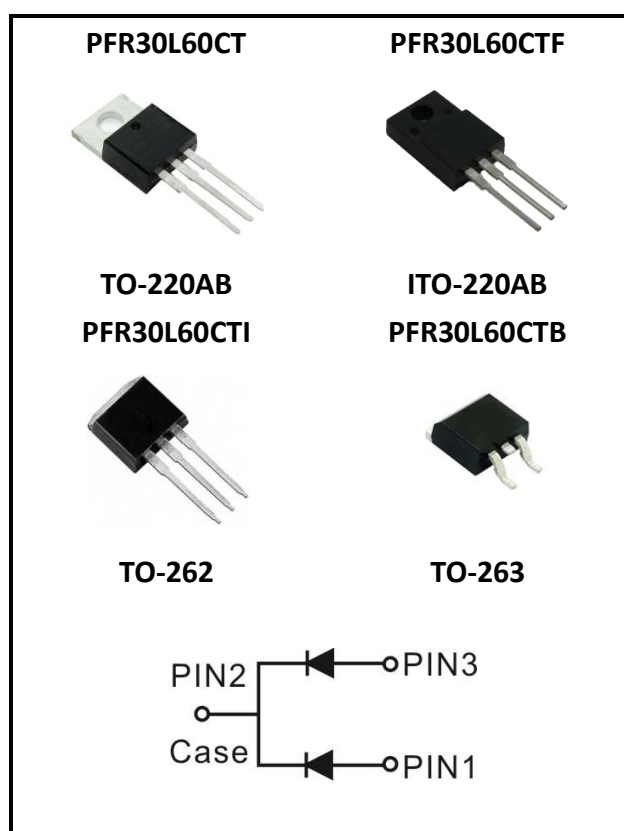

## 1. Characteristics

### Maximum Ratings Characteristics

(  $T_A = 25^{\circ}\text{C}$  unless otherwise specified )

Parameter	Symbol	Values	Units		
DC Blocking Voltage	$V_{RM}$	60	Volts		
Working Peak Reverse Voltage	$V_{RWM}$				
Peak Repetitive Reverse Voltage	$V_{RRM}$				
Average Rectified Forward Current Per device	$I_o$	30	Amps		
(Rated VR-20Khz Square Wave) - 50% duty cycle					
Peak Forward Surge Current - 1/2 60hz	$I_{FSM}$	250	Amps		
Peak Repetitive Reverse Surge Current (2uS-1Khz)	$I_{RRM}$	2	Amps		
Typical Thermal Resistance (per leg) Package = TO-220AB Package =ITO-220AB Package =TO-262 Package =TO-263	$R\theta_{JC}$	2 4 2.5 3	°C / W		
Isolation voltage (ITO-220 only)		$V_{AC}$		1500	V
Maximum Rate of Voltage Change ( at Rated $V_R$ )		$dv/dt$		10000	V/uS
Operating Junction Temperature		$T_J$		- 65 to +150	°C
Storage Junction Temperature	$T_{STG}$	- 65 to +150			

### Electrical Characteristics - (per leg)


(  $T_A = 25^\circ\text{C}$  unless otherwise specified )

Parameter	Test Conditions		Symbol	Typ.	Max.	Units
Instantaneous Forward Voltage	IF = 15 A	T <sub>J</sub> = 25 °C	VF*	----	0.6	Volts
		T <sub>J</sub> = 125 °C		0.53	0.56	
Instantaneous Reverse Current	At V <sub>RM</sub>	T <sub>J</sub> = 25 °C	IR*	----	500	uA
		T <sub>J</sub> = 125 °C		----	100	mA
* Pulse width < 300 uS, Duty cycle < 2%						


## 2. Characteristics Curves

### Ratings and Characteristics Curves


(  $T_A = 25^{\circ}\text{C}$  unless otherwise specified )

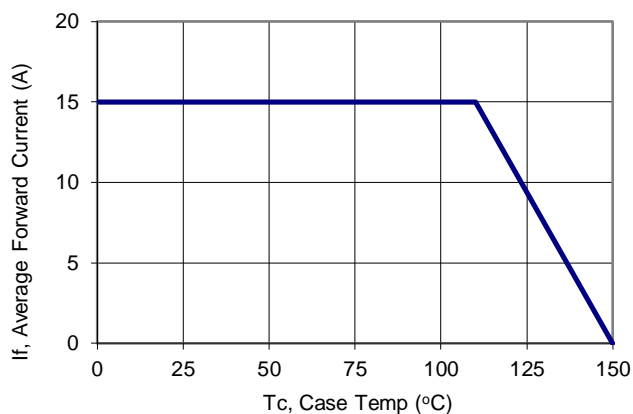


**Figure 1: Current Derating, Case**

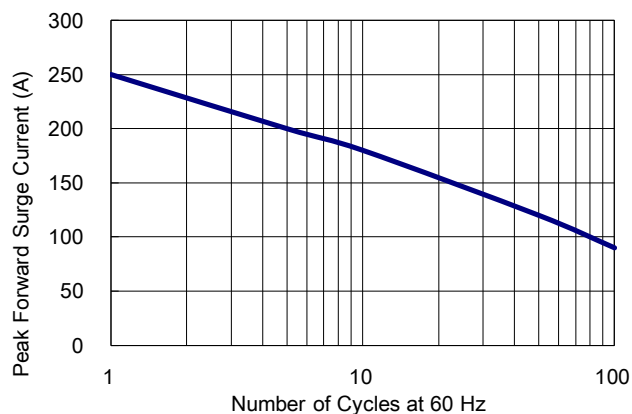


**Figure 2: Maximum Repetitive Surge Current**

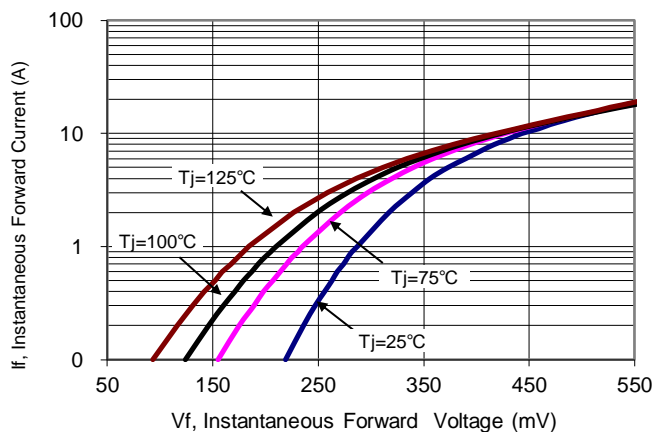

**Figure 3: Typical Forward Voltage**

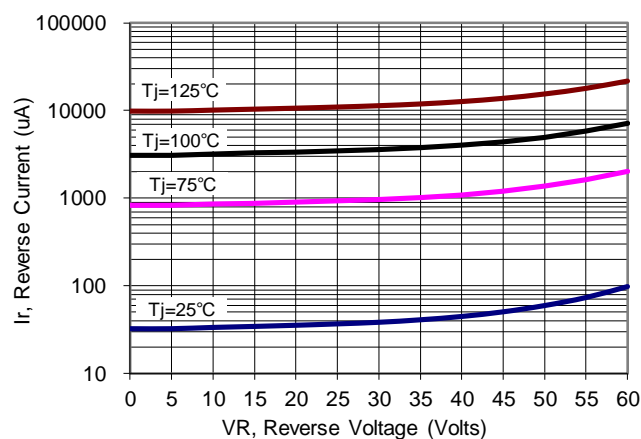

**Figure 4: Typical Reverse Current**

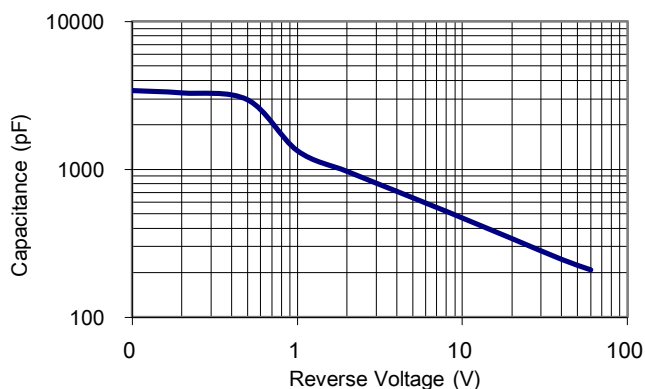

**Figure 5: Typical Junction Capacitance**

### 3. Marking information

---

#### Top Marking Rule

---

**PFC   PFR**  
**30L60CT**  
**YYWW   ABSH**

PFR30L60CT = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

**PFC   PFR**  
**30L60CTF**  
**YYWW   ABSH**

PFR30L60CTF = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

**PFC   PFR**  
**30L60CTI**  
**YYWW   ABSH**

PFR30L60CTI = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

**PFC   PFR**  
**30L60CTB**  
**YYWW   ABSH**

PFR30L60CTB = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

## 5. Ordering information

Part Number	Package	Delivery mode
PFR30L60CT	TO-220AB	50 pieces / tube
PFR30L60CTF	ITO-220AB	50 pieces / tube
PFR30L60CTI	TO-262	50 pieces / tube
PFR30L60CTB	TO-263	800 pieces / 13" diameter reel

Note: For Halogen Free molding compound, add "H" suffix to part number above.

### Mechanical

- Molder Plastic: UL Flammability Classification Rating 94V-0
- Device Weight : 0.07 ounces (1.96grams) - TO-220AB  
0.06 ounces (1.74grams) - ITO-220AB  
0.05 ounces (1.45 grams) - TO-262  
0.04 ounces (1.16 grams) - TO-263
- Mounting Torque : Recommended 4~5 kg-cm.