



PFC Device Corporation

PTR10L100CT
PTR10L100CTF
PTR10L100CTI
PTR10L100CTB

10A 100V HPTR® Schottky Rectifier

Major ratings and characteristics


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular Waveform	5 × 2	A
V_{RRM}	100	V
V_F @ 5A , $T_j=125^\circ\text{C}$	0.55	V, typ.
T_j Operating Junction Temperature	-40 to +150	$^\circ\text{C}$

Features

- Super Low Forward Voltage (SLVF®) Drop
- Reliable High Temperature Operation
- Softest, fast switching capability
- 150 $^\circ\text{C}$ Operating Junction Temperature
- Lead Free Finish, RoHS Compliant

Typical Applications

Device optimized for low forward voltage drop to maximize efficiency in Power Supply applications

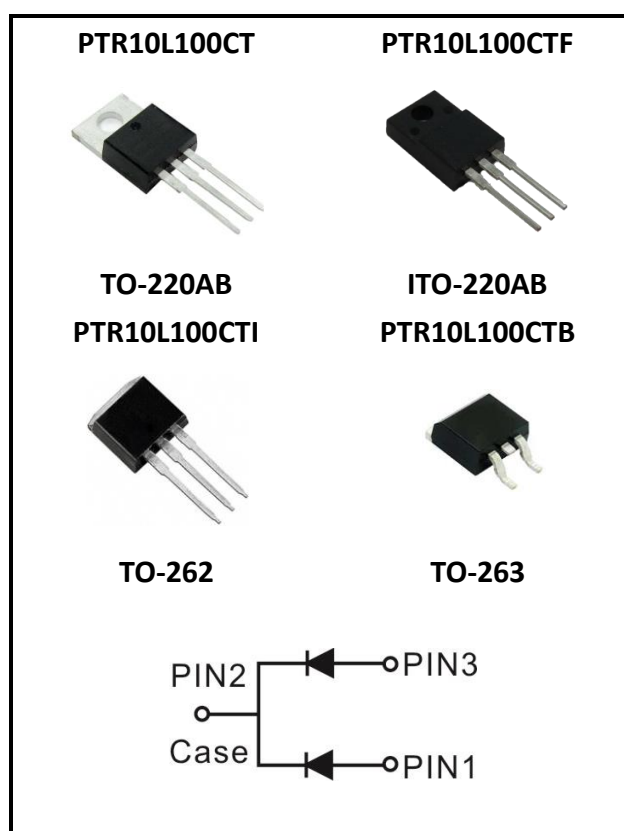

1. Characteristics

Maximum Ratings Characteristics

($T_A = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Values	Units
DC Blocking Voltage	V_{RM}	100	Volts
Working Peak Reverse Voltage	V_{RWM}		
Peak Repetitive Reverse Voltage	V_{RRM}		
Average Rectified Forward Current Per device	I_o	10	Amps
(Rated VR-20Khz Square Wave) - 50% duty cycle			
Peak Forward Surge Current - 1/2 60hz	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2uS-1Khz)	I_{RRM}	1	Amps
Typical Thermal Resistance (per leg) Package = TO-220AB Package = ITO-220AB Package = TO-262 Package = TO-263	$R\theta_{JC}$	2 4 2.5 3	$^{\circ}\text{C} / \text{W}$
Isolation voltage (ITO-220 only)		V_{AC}	
Maximum Rate of Voltage Change (at Rated V_R)		dv/dt	
Operating Junction Temperature		T_J	
Storage Junction Temperature	T_{STG}	- 40 to +150	$^{\circ}\text{C}$

Electrical Characteristics - (per leg)

($T_A = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Test Conditions		Symbol	Typ.	Max.	Units
Instantaneous Forward Voltage	IF = 3 A	T _J = 25 °C	V _F [*]	0.53	-----	Volts
	IF = 5 A			0.61	0.67	
	IF = 3 A	T _J = 125 °C		0.48	-----	
	IF = 5 A			0.55	0.6	
Instantaneous Reverse Current	V _R = 70V	T _J = 25 °C	I _R [*]	2.0	-----	uA
	V _R = 100V			8.0	50	uA
	V _R = 70V	T _J = 125 °C		3.1	-----	mA
	V _R = 100V			6.7	25	mA

* Pulse width < 300 uS, Duty cycle < 2%

3. Marking information

Top Marking Rule

PFC PTR
10L100CT
YYWW AB SH

PTR10L100CT = Product Type Marking Code
YYWW = Date Code
YY = Last two digits of year
WW = Week code
AB = Assembly code
S = Series Number
H = Halogen Free (N/A = common molding compound)

PFC PTR
10L100CTF
YYWW AB SH

PTR10L100CTF = Product Type Marking Code
YYWW = Date Code
YY = Last two digits of year
WW = Week code
AB = Assembly code
S = Series Number
H = Halogen Free (N/A = common molding compound)

PFC PTR
10L100CTI
YYWW AB SH

PTR10L100CTI = Product Type Marking Code
YYWW = Date Code
YY = Last two digits of year
WW = Week code
AB = Assembly code
S = Series Number
H = Halogen Free (N/A = common molding compound)

PFC PTR
10L100CTB
YYWW AB SH

PTR10L100CTB = Product Type Marking Code
YYWW = Date Code
YY = Last two digits of year
WW = Week code
AB = Assembly code
S = Series Number
H = Halogen Free (N/A = common molding compound)

5. Ordering information

Part Number	Package	Delivery mode
PTR10L100CT	TO-220AB	50 pieces / tube
PTR10L100CTF	ITO-220AB	50 pieces / tube
PTR10L100CTI	TO-262	50 pieces / tube
PTR10L100CTB	TO-263	800 pieces / 13" diameter reel

Note: For Halogen Free molding compound, add "H" suffix to part number above.

Mechanical

- Molder Plastic: UL Flammability Classification Rating 94V-0
- Device Weight : 0.07 ounces (1.96grams) - TO-220AB
0.06 ounces (1.74grams) - ITO-220AB
0.05 ounces (1.45 grams) - TO-262
0.04 ounces (1.16 grams) - TO-263
- Mounting Torque : Recommended 4~5 kg-cm.