N-Channel MOSFET Transistor

TK80A04K3L，ITK80A04K3L

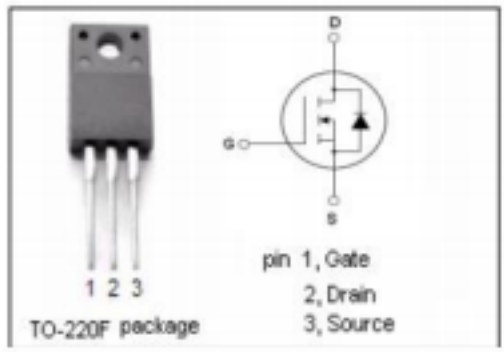

• FEATURES

- Low drain-source on-resistance:
  $R_{DS}(ON)$ = 2.4mΩ (typ.) (V_{GS} = 10 V)
- Enhancement mode:
  V_{th} = 2.0 to 3.0V (V_{DS} = 10 V, I_D=1mA)
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• DESCRITION

- Switching Voltage Regulators

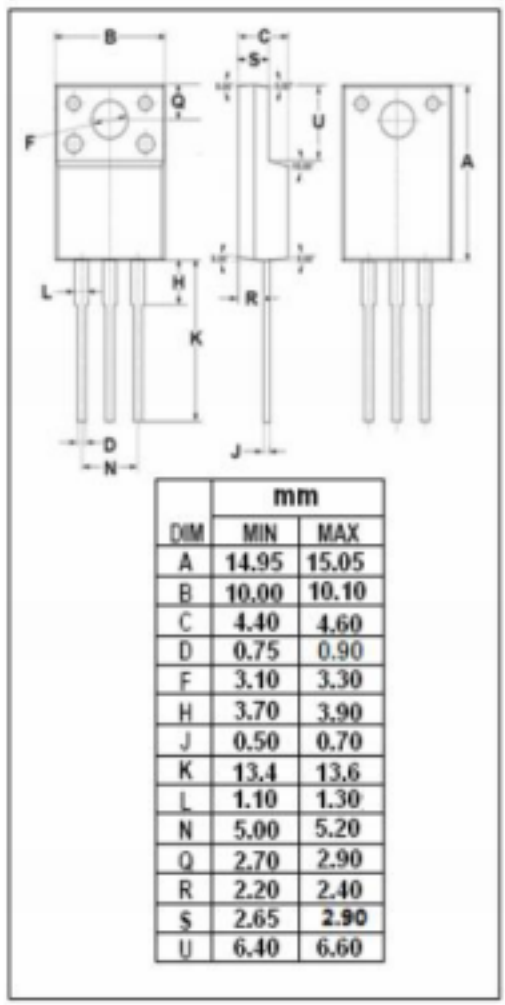

DIM	mm MIN	mm MAX
A	14.95	15.05
B	10.00	10.10
C	4.40	4.60
D	0.75	0.90
F	3.10	3.30
H	3.70	3.90
J	0.50	0.70
K	13.4	13.6
L	1.10	1.30
N	5.00	5.20
Q	2.70	2.90
R	2.20	2.40
S	2.65	2.90
U	6.40	6.60

• ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	±20	V
I_D	Drain Current-Continuous	80	A
I_{DM}	Drain Current-Single Pulsed	320	A
P_D	Total Dissipation @T_C=25℃	48	W
T_j	Max. Operating Junction Temperature	175	℃
T_{stg}	Storage Temperature	-55~175	℃

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
Rth(ch-c)	Channel-to-case thermal resistance	3.125	℃/W
Rth(ch-a)	Channel-to-ambient thermal resistance	62.5	℃/W

N-Channel MOSFET Transistor TK80A04K3L，ITK80A04K3L

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V; I_D= 10mA	40			V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}= 10V; I_D=1mA	2.0		3.0	V
$R_{DS(on)}$	Drain-Source On-Resistance	V_{GS}=6V; I_D=40A			3.5	mΩ
		V_{GS}=10V; I_D=40A			2.4	
I_{GSS}	Gate-Source Leakage Current	V_{GS}= ±16V;V_{DS}= 0V			±10	μA
I_{DSS}	Drain-Source Leakage Current	V_{DS}= 40V; V_{GS}= 0V			10	μA
V_{SDF}	Diode forward voltage	I_{DR} =80A, V_{GS} = 0 V			1.2	V