



FQP8N90C / FQPF8N90C

N-Channel QFET® MOSFET


900 V, 6.3 A, 1.9 Ω

Description


This N-Channel enhancement mode power MOSFET is produced using Fairchild Semiconductor's proprietary planar stripe and DMOS technology. This advanced MOSFET technology has been especially tailored to reduce on-state resistance, and to provide superior switching performance and high avalanche energy strength. These devices are suitable for switched mode power supplies, active power factor correction (PFC), and electronic lamp ballasts.

Features


- 6.3 A, 900 V, $R_{DS(on)} = 1.9 \Omega$ (Max.) @ $V_{GS} = 10$ V, $I_D = 3.15$ A
- Low Gate Charge (Typ. 35 nC)
- Low Crss (Typ. 12 pF)
- 100% Avalanche Tested



TO-220



TO-220F



Absolute Maximum Ratings

$T_C = 25^\circ\text{C}$ unless otherwise noted.

Symbol	Parameter	FQP8N90C	FQPF8N90C	Unit	
V_{DSS}	Drain-Source Voltage	900		V	
I_D	Drain Current - Continuous ($T_C = 25^\circ\text{C}$)	6.3	6.3 *	A	
	- Continuous ($T_C = 100^\circ\text{C}$)	3.8	3.8 *	A	
I_{DM}	Drain Current - Pulsed	(Note 1)	25	25 *	A
V_{GSS}	Gate-Source Voltage		± 30	V	
E_{AS}	Single Pulsed Avalanche Energy	(Note 2)	850	mJ	
I_{AR}	Avalanche Current	(Note 1)	6.3	A	
E_{AR}	Repetitive Avalanche Energy	(Note 1)	17.1	mJ	
dv/dt	Peak Diode Recovery dv/dt	(Note 3)	4.0	V/ns	
P_D	Power Dissipation ($T_C = 25^\circ\text{C}$)	171	60	W	
	- Derate above 25°C	1.37	0.48	W/ $^\circ\text{C}$	
T_J, T_{STG}	Operating and Storage Temperature Range		-55 to +150	$^\circ\text{C}$	
T_L	Maximum Lead Temperature for Soldering, 1/8" from Case for 5 Seconds		300	$^\circ\text{C}$	

* Drain current limited by maximum junction temperature.

Thermal Characteristics

Symbol	Parameter	FQP8N90C	FQPF8N90C	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case, Max.	0.73	2.08	$^\circ\text{C}/\text{W}$
$R_{\theta CS}$	Thermal Resistance, Case-to-Sink Typ, Max.	0.5	--	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient, Max.	62.5	62.5	$^\circ\text{C}/\text{W}$

Package Marking and Ordering Information

Part Number	Top Mark	Package	Packing Method	Reel Size	Tape Width	Quantity
FQP8N90C	FQP8N90C	TO-220	Tube	N/A	N/A	50 units
FQPF8N90C	FQPF8N90C	TO-220F	Tube	N/A	N/A	50 units

Electrical Characteristics

$T_C = 25^\circ\text{C}$ unless otherwise noted.

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
--------	-----------	-----------------	------	------	------	------

Off Characteristics

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$	900	--	--	V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D = 250 \mu\text{A}$, Referenced to 25°C	--	0.95	--	$\text{V}/^\circ\text{C}$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}} = 900 \text{ V}, V_{\text{GS}} = 0 \text{ V}$	--	--	10	μA
		$V_{\text{DS}} = 720 \text{ V}, T_C = 125^\circ\text{C}$	--	--	100	μA
I_{GSSF}	Gate-Body Leakage Current, Forward	$V_{\text{GS}} = 30 \text{ V}, V_{\text{DS}} = 0 \text{ V}$	--	--	100	nA
I_{GSSR}	Gate-Body Leakage Current, Reverse	$V_{\text{GS}} = -30 \text{ V}, V_{\text{DS}} = 0 \text{ V}$	--	--	-100	nA

On Characteristics

$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250 \mu\text{A}$	3.0	--	5.0	V
$R_{\text{DS(on)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}} = 10 \text{ V}, I_D = 3.15 \text{ A}$	--	1.6	1.9	Ω
g_{FS}	Forward Transconductance	$V_{\text{DS}} = 50 \text{ V}, I_D = 3.15 \text{ A}$	--	5.5	--	S

Dynamic Characteristics

C_{iss}	Input Capacitance	$V_{\text{DS}} = 25 \text{ V}, V_{\text{GS}} = 0 \text{ V}, f = 1.0 \text{ MHz}$	--	1600	2080	pF
C_{oss}	Output Capacitance		--	130	170	pF
C_{rss}	Reverse Transfer Capacitance		--	12	15	pF

Switching Characteristics

$t_{\text{d(on)}}$	Turn-On Delay Time	$V_{\text{DD}} = 450 \text{ V}, I_D = 8 \text{ A}, R_G = 25 \Omega$	--	40	90	ns
t_r	Turn-On Rise Time		--	110	230	ns
$t_{\text{d(off)}}$	Turn-Off Delay Time		--	70	150	ns
t_f	Turn-Off Fall Time		--	70	150	ns
Q_g	Total Gate Charge	$V_{\text{DS}} = 720 \text{ V}, I_D = 8 \text{ A}, V_{\text{GS}} = 10 \text{ V}$	--	35	45	nC
Q_{gs}	Gate-Source Charge		--	10	--	nC
Q_{gd}	Gate-Drain Charge		--	14	--	nC
			(Note 4)			

Drain-Source Diode Characteristics and Maximum Ratings

I_S	Maximum Continuous Drain-Source Diode Forward Current	--	--	6.3	A
I_{SM}	Maximum Pulsed Drain-Source Diode Forward Current	--	--	25	A
V_{SD}	Drain-Source Diode Forward Voltage	$V_{\text{GS}} = 0 \text{ V}, I_S = 6.3 \text{ A}$	--	--	1.4
t_{rr}	Reverse Recovery Time	$V_{\text{GS}} = 0 \text{ V}, I_S = 8 \text{ A}, dI_F / dt = 100 \text{ A}/\mu\text{s}$	--	530	--
Q_{rr}	Reverse Recovery Charge		--	5.8	μC

Notes:

1. Repetitive rating : pulse-width limited by maximum junction temperature.

2. $L = 40 \text{ mH}, I_{AS} = 6.3 \text{ A}, V_{DD} = 50 \text{ V}, R_G = 25 \Omega$, starting $T_J = 25^\circ\text{C}$.

3. $I_{SD} \leq 8 \text{ A}, dI/dt \leq 200 \text{ A}/\mu\text{s}, V_{DD} \leq \text{BV}_{\text{DSS}}$, starting $T_J = 25^\circ\text{C}$.

4. Essentially independent of operating temperature.

Typical Characteristics

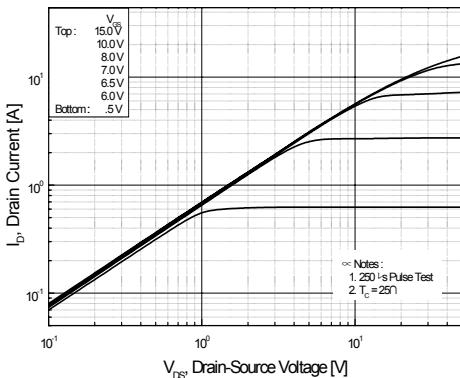


Figure 1. On-Region Characteristics

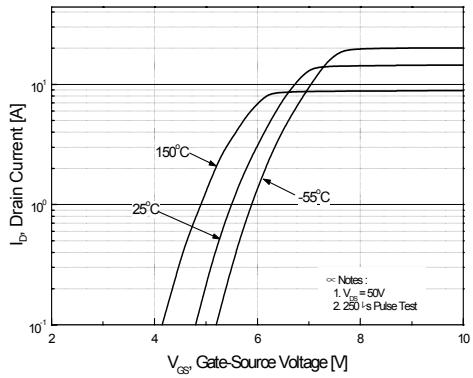


Figure 2. Transfer Characteristics

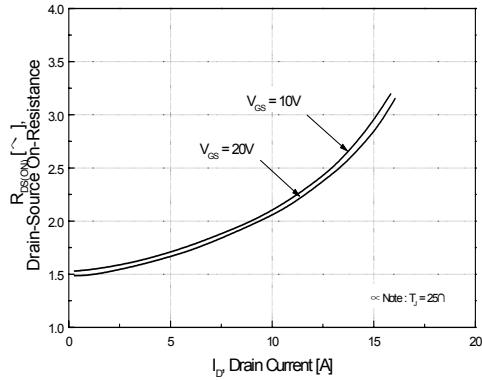


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

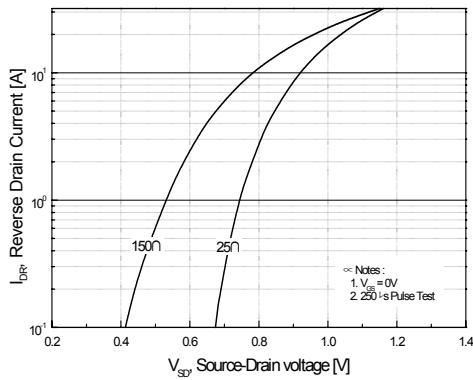


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

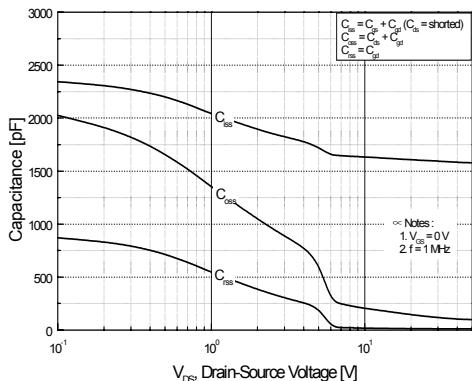


Figure 5. Capacitance Characteristics

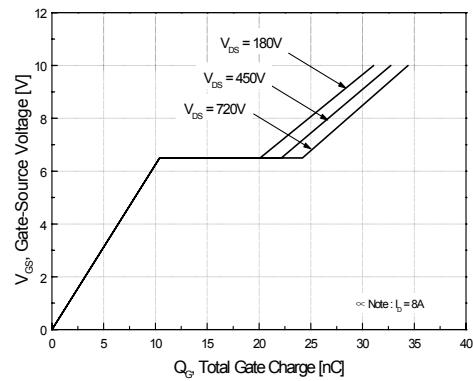


Figure 6. Gate Charge Characteristics