FQP45N03L

30V LOGIC N-Channel MOSFET

General Description

These N-Channel enhancement mode power field effect transistors are produced using Fairchild's proprietary, planar stripe, DMOS technology.
This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for low voltage applications such as DC/DC converters, high efficiency switching for power management in portable and battery operated products.

Features

- 45A, 30V, $R_{DS(on)}$ = 0.018Ω @V_{GS} = 10 V
- Low gate charge (typical 15 nC)
- Low Crss (typical 105 pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- 175°C maximum junction temperature rating



TO-220
FQP Series



Absolute Maximum Ratings

T_C = 25°C unless otherwise noted

Symbol	Parameter		FQP45N03L	Units
V_{DSS}	Drain-Source Voltage		30	V
I_D	Drain Current - Continuous (T_C = 25°C)		45	A
	- Continuous (T_C = 100°C)		31.8	A
I_{DM}	Drain Current - Pulsed	(Note 1)	180	A
V_{GSS}	Gate-Source Voltage		± 20	V
E_{AS}	Single Pulsed Avalanche Energy	(Note 2)	200	mJ
I_{AR}	Avalanche Current	(Note 1)	45	A
E_{AR}	Repetitive Avalanche Energy	(Note 1)	7.5	mJ
dv/dt	Peak Diode Recovery dv/dt	(Note 3)	7.0	V/ns
P_D	Power Dissipation (T_C = 25°C)		75	W
	- Derate above 25°C		0.5	W/°C
T_J, T_{STG}	Operating and Storage Temperature Range		-55 to +175	°C
T_L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds		300	°C

Thermal Characteristics

Symbol	Parameter	Typ	Max	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	--	2.0	°C/W
$R_{\theta CS}$	Thermal Resistance, Case-to-Sink	0.5	--	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	--	62.5	°C/W

Electrical Characteristics

T_C = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS} = 0 V, I_D = 250 μA	30	--	--	V
ΔBV_{DSS} / ΔT_J	Breakdown Voltage Temperature Coefficient	I_D = 250 μA, Referenced to 25°C	--	0.03	--	V/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 30 V, V_{GS} = 0 V	--	--	1	μA
		V_{DS} = 24 V, T_C = 150°C	--	--	10	μA
I_{GSSF}	Gate-Body Leakage Current, Forward	V_{GS} = 20 V, V_{DS} = 0 V	--	--	100	nA
I_{GSSR}	Gate-Body Leakage Current, Reverse	V_{GS} = -20 V, V_{DS} = 0 V	--	--	-100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250 μA	1.0	--	2.5	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	V_{GS} = 10 V, I_D = 22.5 A V_{GS} = 5 V, I_D = 22.5 A	-- --	0.0136 0.0192	0.018 0.025	Ω
g_{FS}	Forward Transconductance	V_{DS} = 15 V, I_D = 22.5 A (Note 4)	--	24.3	--	S
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS} = 25 V, V_{GS} = 0 V, f = 1.0 MHz	--	780	1000	pF
C_{oss}	Output Capacitance		--	420	550	pF
C_{rss}	Reverse Transfer Capacitance		--	105	140	pF
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{DD} = 15 V, I_D = 22.5 A, R_G = 25 Ω (Note 4, 5)	--	15	40	ns
t_r	Turn-On Rise Time		--	130	270	ns
$t_{d(off)}$	Turn-Off Delay Time		--	7.5	25	ns
t_f	Turn-Off Fall Time		--	60	130	ns
Q_g	Total Gate Charge	V_{DS} = 24 V, I_D = 45 A, V_{GS} = 5 V (Note 4, 5)	--	15	20	nC
Q_{gs}	Gate-Source Charge		--	5.0	--	nC
Q_{gd}	Gate-Drain Charge		--	8.0	--	nC
Drain-Source Diode Characteristics and Maximum Ratings						
I_S	Maximum Continuous Drain-Source Diode Forward Current		--	--	45	A
I_{SM}	Maximum Pulsed Drain-Source Diode Forward Current		--	--	180	A
V_{SD}	Drain-Source Diode Forward Voltage	V_{GS} = 0 V, I_S = 45 A	--	--	1.5	V
t_{rr}	Reverse Recovery Time	V_{GS} = 0 V, I_S = 45 A, dI_F / dt = 100 A/μs (Note 4)	--	35	--	ns
Q_{rr}	Reverse Recovery Charge		--	30	--	nC

Notes:
1. Repetitive Rating : Pulse width limited by maximum junction temperature
2. L = 98μH, I_{AS} = 45A, V_{DD} = 15V, R_G = 25 Ω, Starting T_J = 25°C
3. I_{SD} ≤ 45A, di/dt ≤ 300A/us, V_{DD} ≤ $BV_{DSS,}$ Starting T_J = 25°C
4. Pulse Test : Pulse width ≤ 300μs, Duty cycle ≤ 2%
5. Essentially independent of operating temperature

Typical Characteristics

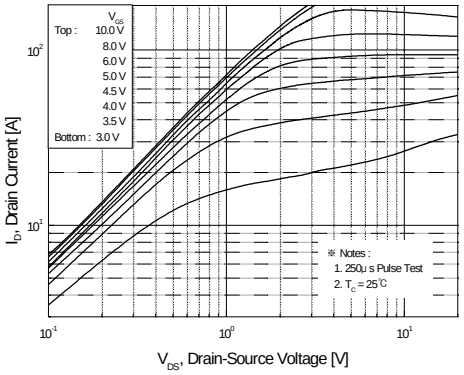

Figure 1. On-Region Characteristics

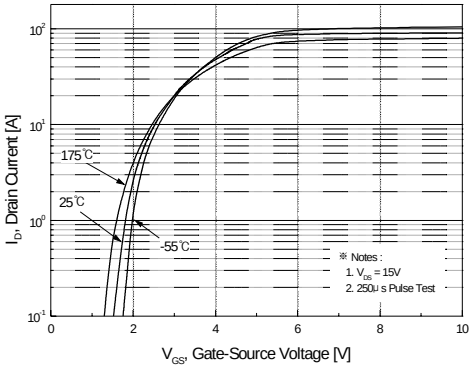

Figure 2. Transfer Characteristics

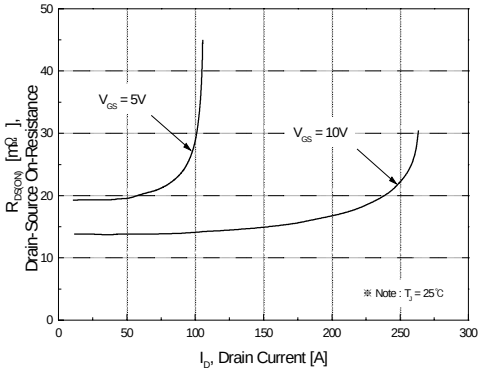

Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

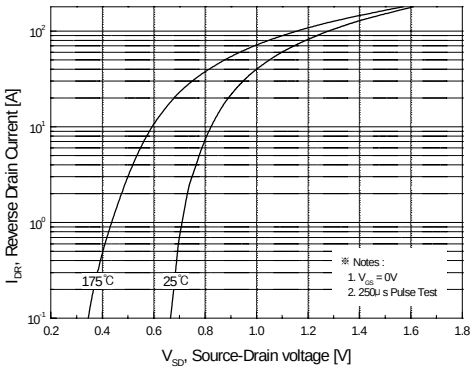

Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature

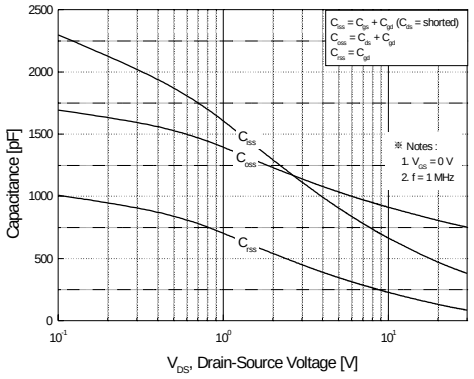

Figure 5. Capacitance Characteristics

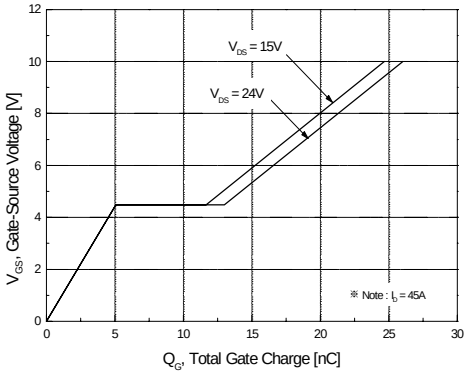

Figure 6. Gate Charge Characteristics