

FEATURES


- Avalanche Rugged Technology
- Rugged Gate Oxide Technology
- Lower Input Capacitance
- Improved Gate Charge
- 175°C Operating Temperature
- Extended Safe Operating Area
- Lower Leakage Current : -10 μ A (Max.) @ $V_{DS} = -60V$
- Low $R_{DS(ON)}$: 0.206 Ω (Typ.)

$$BV_{DSS} = -60 V$$

$$R_{DS(on)} = 0.28 \Omega$$

$$I_D = -9.7 A$$

TO-220



1.Gate 2. Drain 3. Source

Absolute Maximum Ratings

| Symbol | Characteristic | Value | Units |
|----------------|---|--------------|------------|
| V_{DSS} | Drain-to-Source Voltage | -60 | V |
| I_D | Continuous Drain Current ($T_C=25^\circ C$) | -9.7 | A |
| | Continuous Drain Current ($T_C=100^\circ C$) | -6.8 | |
| I_{DM} | Drain Current-Pulsed ① | -40 | A |
| V_{GS} | Gate-to-Source Voltage | ± 30 | V |
| E_{AS} | Single Pulsed Avalanche Energy ② | 161 | mJ |
| I_{AR} | Avalanche Current ① | -9.7 | A |
| E_{AR} | Repetitive Avalanche Energy ① | 4.9 | mJ |
| dv/dt | Peak Diode Recovery dv/dt ③ | -5.5 | V/ns |
| P_D | Total Power Dissipation ($T_C=25^\circ C$) | 49 | W |
| | Linear Derating Factor | 0.33 | |
| T_J, T_{STG} | Operating Junction and Storage Temperature Range | - 55 to +175 | $^\circ C$ |
| T_L | Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5-seconds | 300 | |

Thermal Resistance

| Symbol | Characteristic | Typ. | Max. | Units |
|-----------------|---------------------|------|------|--------------|
| $R_{\theta JC}$ | Junction-to-Case | -- | 3.06 | $^\circ C/W$ |
| $R_{\theta CS}$ | Case-to-Sink | 0.5 | -- | |
| $R_{\theta JA}$ | Junction-to-Ambient | -- | 62.5 | |

Electrical Characteristics ($T_C=25^\circ\text{C}$ unless otherwise specified)

| Symbol | Characteristic | Min. | Typ. | Max. | Units | Test Condition |
|------------------------|---|------|-------|------|--------------------|--|
| BV_{DSS} | Drain-Source Breakdown Voltage | -60 | -- | -- | V | $V_{GS}=0V, I_D=-250\mu\text{A}$ |
| $\Delta BV/\Delta T_J$ | Breakdown Voltage Temp. Coeff. | -- | -0.04 | -- | $V/^\circ\text{C}$ | $I_D=-250\mu\text{A}$ See Fig 7 |
| $V_{GS(th)}$ | Gate Threshold Voltage | -2.0 | -- | -4.0 | V | $V_{DS}=-5V, I_D=-250\mu\text{A}$ |
| I_{GSS} | Gate-Source Leakage , Forward | -- | -- | -100 | nA | $V_{GS}=-20V$ |
| | Gate-Source Leakage , Reverse | -- | -- | 100 | | $V_{GS}=20V$ |
| I_{DSS} | Drain-to-Source Leakage Current | -- | -- | -10 | μA | $V_{DS}=-60V$ |
| | | -- | -- | -100 | | $V_{DS}=-48V, T_C=150^\circ\text{C}$ |
| $R_{DS(on)}$ | Static Drain-Source On-State Resistance | -- | -- | 0.28 | Ω | $V_{GS}=-10V, I_D=-4.9A$ ④ |
| g_{fs} | Forward Transconductance | -- | 4.1 | -- | S | $V_{DS}=-30V, I_D=-4.9A$ ④ |
| C_{iss} | Input Capacitance | -- | 465 | 600 | pF | $V_{GS}=0V, V_{DS}=-25V, f=1\text{MHz}$ See Fig 5 |
| C_{oss} | Output Capacitance | -- | 140 | 215 | | |
| C_{rss} | Reverse Transfer Capacitance | -- | 40 | 60 | | |
| $t_{d(on)}$ | Turn-On Delay Time | -- | 11 | 30 | ns | $V_{DD}=-30V, I_D=-9.7A,$ $R_G=18\Omega$ See Fig 13 ④⑤ |
| t_r | Rise Time | -- | 21 | 50 | | |
| $t_{d(off)}$ | Turn-Off Delay Time | -- | 29 | 65 | | |
| t_f | Fall Time | -- | 20 | 50 | | |
| Q_g | Total Gate Charge | -- | 15 | 19 | nC | $V_{DS}=-48V, V_{GS}=-10V,$ $I_D=-9.7A$ See Fig 6 & Fig 12 ④⑤ |
| Q_{gs} | Gate-Source Charge | -- | 2.9 | -- | | |
| Q_{gd} | Gate-Drain("Miller") Charge | -- | 6.0 | -- | | |

Source-Drain Diode Ratings and Characteristics

| Symbol | Characteristic | Min. | Typ. | Max. | Units | Test Condition |
|----------|---------------------------|------|------|------|---------------|--|
| I_S | Continuous Source Current | -- | -- | -9.7 | A | Integral reverse pn-diode in the MOSFET |
| I_{SM} | Pulsed-Source Current ① | -- | -- | -40 | | |
| V_{SD} | Diode Forward Voltage ④ | -- | -- | -3.8 | V | $T_J=25^\circ\text{C}, I_S=-9.7A, V_{GS}=0V$ |
| t_{rr} | Reverse Recovery Time | -- | 80 | -- | ns | $T_J=25^\circ\text{C}, I_F=-9.7A$ |
| Q_{rr} | Reverse Recovery Charge | -- | 0.22 | -- | μC | $di/dt=100A/\mu\text{s}$ ④ |

Notes ;

- ① Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- ② $L=2.0\text{mH}, I_{AS}=-9.7A, V_{DD}=-25V, R_G=27\Omega^*,$ Starting $T_J=25^\circ\text{C}$
- ③ $I_{SD} \leq -9.7A, di/dt \leq 250A/\mu\text{s}, V_{DD} \leq BV_{DSS},$ Starting $T_J=25^\circ\text{C}$
- ④ Pulse Test : Pulse Width = $250\mu\text{s},$ Duty Cycle $\leq 2\%$
- ⑤ Essentially Independent of Operating Temperature

Fig 1. Output Characteristics

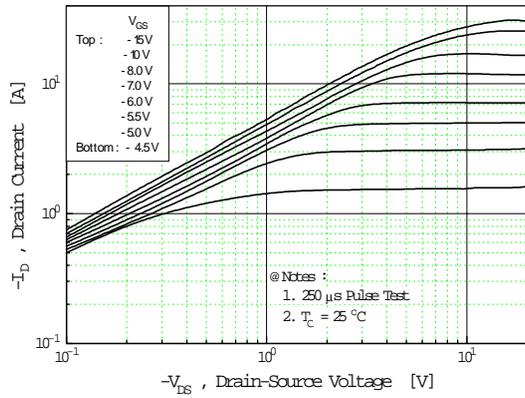


Fig 2. Transfer Characteristics

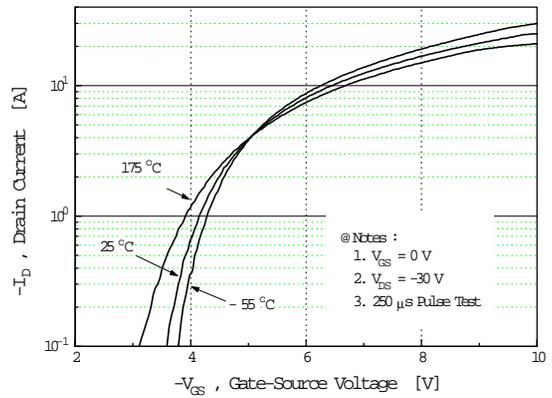


Fig 3. On-Resistance vs. Drain Current

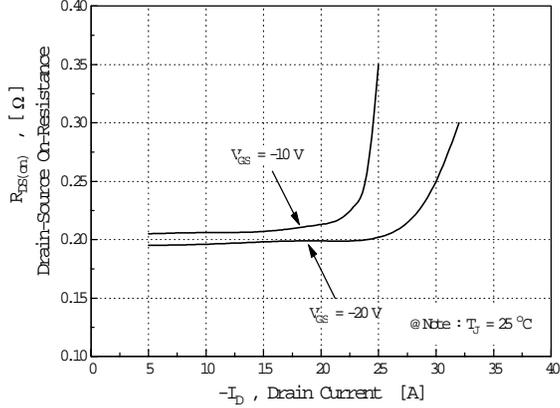


Fig 4. Source-Drain Diode Forward Voltage

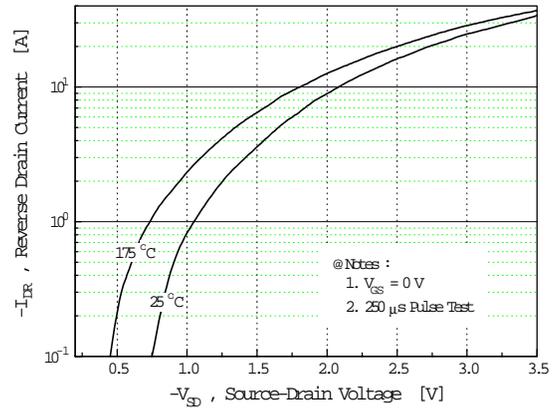


Fig 5. Capacitance vs. Drain-Source Voltage

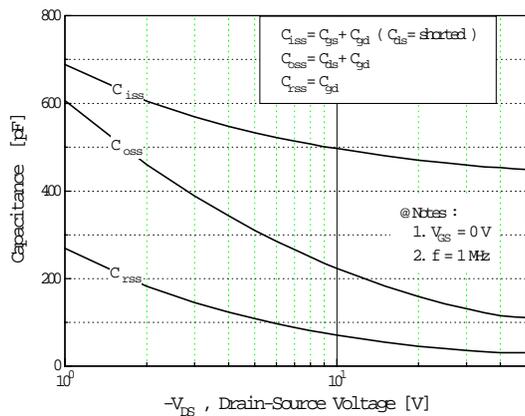


Fig 6. Gate Charge vs. Gate-Source Voltage

