STD13003

HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- REVERSE PINS OUT Vs STANDARD IPAK (TO-251) / DPAK (TO-252) PACKAGES
- MEDIUM VOLTAGE CAPABILITY
- LOW SPREAD OF DYNAMIC PARAMETERS
- MINIMUM LOT-TO-LOT SPREAD FOR RELIABLE OPERATION
- VERY HIGH SWITCHING SPEED
- SURFACE-MOUNTING DPAK (TO-252) POWER PACKAGE IN TAPE & REEL (Suffix "T4")
- THROUGH-HOLE IPAK (TO-251) POWER PACKAGE IN TUBE (Suffix "-1")



IPAK
TO-251
(Suffix "-1")



DPAK
TO-252
(Suffix "T4")

APPLICATIONS:

- ELECTRONIC BALLASTS FOR FLUORESCENT LIGHTING
- SWITCH MODE POWER SUPPLIES

DESCRIPTION

The device is manufactured using high voltage Multi Epitaxial Planar technology for high switching speeds and medium voltage capability.

It uses a Cellular Emitter structure with planar edge termination to enhance switching speeds while maintaining the wide RBSOA.

The device is designed for use in lighting applications and low cost switch-mode power supplies.

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CES}	Collector-Emitter Voltage (V_{BE} = 0)	700	V
V_{CEO}	Collector-Emitter Voltage (I_B = 0)	400	V
V_{EBO}	Emitter-Base Voltage (I_C = 0, I_B = 0.75 A, t_p < 10µs, T_j < 150°C)	BV_{EBO}	V
I_C	Collector Current	1.5	A
I_{CM}	Collector Peak Current (t_p < 5 ms)	3	A
I_B	Base Current	0.75	A
I_{BM}	Base Peak Current (t_p < 5 ms)	1.5	A
P_{tot}	Total Dissipation at T_c = 25 °C	20	W
T_{stg}	Storage Temperature	-65 to 150	°C
T_j	Max. Operating Junction Temperature	150	°C

THERMAL DATA

$R_{thj\text{-}case}$	Thermal Resistance Junction-case	Max	6.25	$^oC/W$
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient	Max	100	$^oC/W$

ELECTRICAL CHARACTERISTICS (T_{case} = 25 ^oC unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
I_{CEV}	Collector Cut-off Current (V_{BE} = -1.5V)	V_{CE} = 700V V_{CE} = 700V	 T_j = 125^oC			1 5	mA mA
BV_{EBO}	Emitter-Base Breakdown Voltage (I_C = 0)	I_E = 10 mA		9		18	V
$V_{CEO(sus)}$*	Collector-Emitter Sustaining Voltage (I_B = 0)	I_C = 10 mA L = 25 mH		400			V
$V_{CE(sat)}$*	Collector-Emitter Saturation Voltage	I_C = 0.5 A I_C = 1 A I_C = 1.5 A	I_B = 0.1 A I_B = 0.25 A I_B = 0.5 A			0.5 1 3	V V V
$V_{BE(sat)}$*	Base-Emitter Saturation Voltage	I_C = 0.5 A I_C = 1 A	I_B = 0.1 A I_B = 0.25 A			1 1.2	V V
h_{FE}*	DC Current Gain	I_C = 0.5 A Group A Group B I_C = 1 A	V_{CE} = 2 V V_{CE} = 2 V	 8 15 5		 20 35 25	
 t_r t_s t_f	RESISTIVE LOAD Rise Time Storage Time Fall Time	 I_C = 1 A I_{B1} = 0.2 A T_p= 25 µs	 V_{CC} = 125 V I_{B2} = -0.2 A			 1 4 0.7	 µs µs µs
t_s	INDUCTIVE LOAD Storage Time	I_C = 1 A V_{BE} = -5 V V_{clamp} = 300 V	I_{B1} = 0.2 A L = 50 mH		0.8		µs

* Pulsed: Pulse duration = 300µs, duty cycle = 1.5 %

Note : Product is pre-selected in DC current gain (GROUP A and GROUP B). STMicroelectronics reserves the right to ship either groups according to production availability. Please contact your nearest STMicroelectronics sales office for delivery details.

Safe Operating Areas

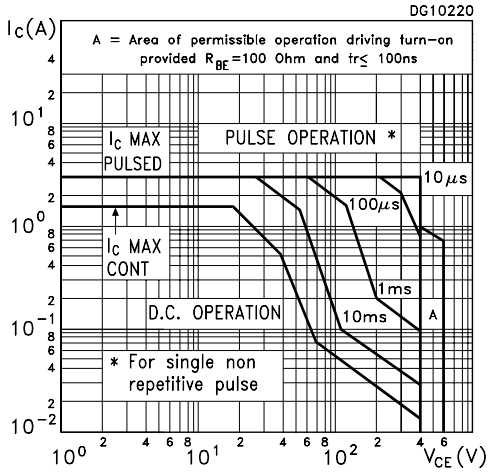

Derating Curve

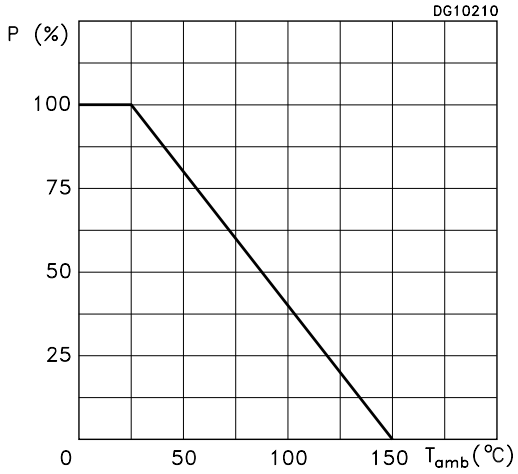

DC Current Gain

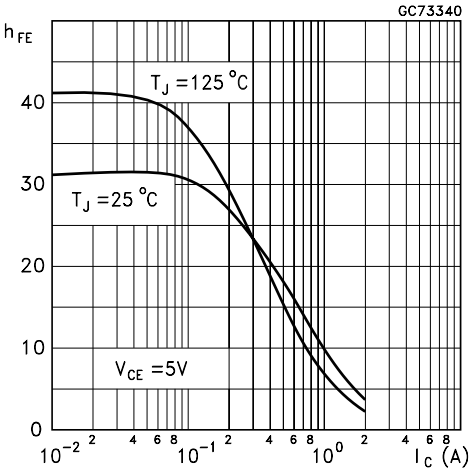

DC Current Gain

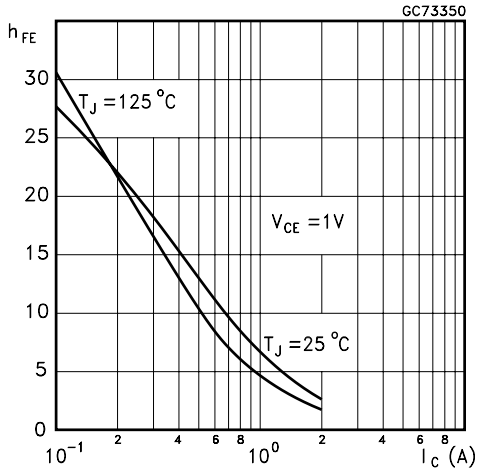

Collector Emitter Saturation Voltage

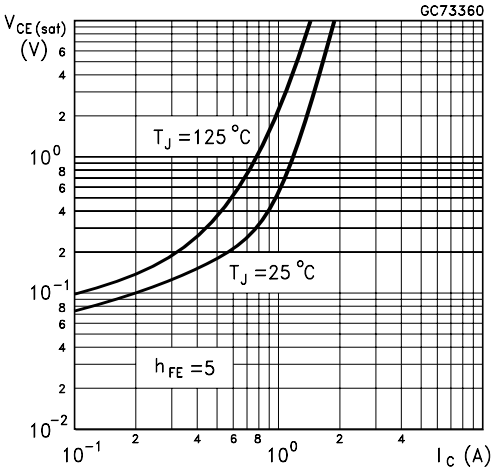
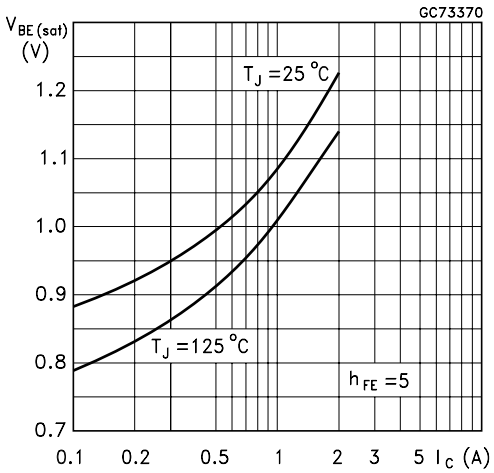
Base Emitter Saturation Voltage