


Bi-Directional Triode Thyristor


Features

- ◆ Repetitive Peak Off-State Voltage : 600V
- ◆ R.M.S On-State Current ($I_{T(RMS)} = 16 \text{ A}$)
- ◆ High Commutation dv/dt
- ◆ Non-isolated Type

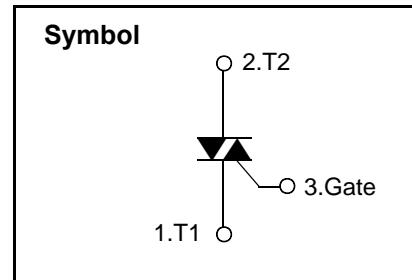

General Description

This device is suitable for AC switching application, phase control application such as fan speed and temperature modulation control, lighting control and static switching relay.

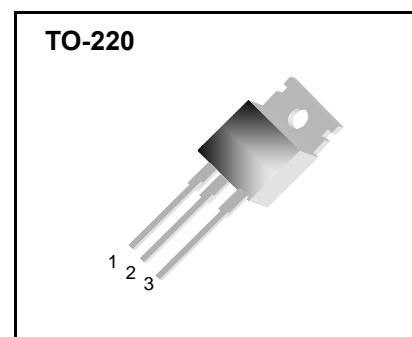

Absolute Maximum Ratings ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Condition	Ratings	Units
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_{T(RMS)}$	R.M.S On-State Current	$T_C = 98^\circ\text{C}$	16	A
I_{TSM}	Surge On-State Current	One Cycle, 50Hz/60Hz, Peak, Non-Repetitive	155/170	A
I^2t	I^2t		120	A^2s
P_{GM}	Peak Gate Power Dissipation		5.0	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.5	W
I_{GM}	Peak Gate Current		2.0	A
V_{GM}	Peak Gate Voltage		10	V
T_J	Operating Junction Temperature		- 40 ~ 125	$^\circ\text{C}$
T_{STG}	Storage Temperature		- 40 ~ 150	$^\circ\text{C}$
	Mass		2.0	g


STP16A60

Electrical Characteristics


Symbol	Items	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$V_D = V_{DRM}$, Single Phase, Half Wave $T_J = 125^\circ C$	—	—	2.0	mA
V_{TM}	Peak On-State Voltage	$I_T = 25 A$, Inst. Measurement	—	—	1.4	V
I^+_{GT1}	I	Gate Trigger Current	—	—	30	mA
I^-_{GT1}	II		—	—	30	
I^-_{GT3}	III		—	—	30	
V^+_{GT1}	I	Gate Trigger Voltage	—	—	1.5	V
V^-_{GT1}	II		—	—	1.5	
V^-_{GT3}	III		—	—	1.5	
V_{GD}	Non-Trigger Gate Voltage	$T_J = 125^\circ C$, $V_D = 1/2 V_{DRM}$	0.2	—	—	V
$(dv/dt)_c$	Critical Rate of Rise Off-State Voltage at Commutation	$T_J = 125^\circ C$, $[di/dt]_c = -8.0 A/ms$, $V_D=2/3 V_{DRM}$	10	—	—	V/ μ s
I_H	Holding Current		—	25	—	mA
$R_{th(j-c)}$	Thermal Impedance	Junction to case	—	—	1.4	°C/W

STP16A60

Fig 1. Gate Characteristics

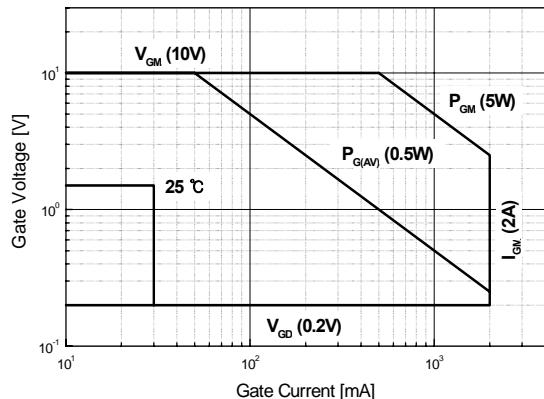

**Fig 3. On State Current vs.
Maximum Power Dissipation**

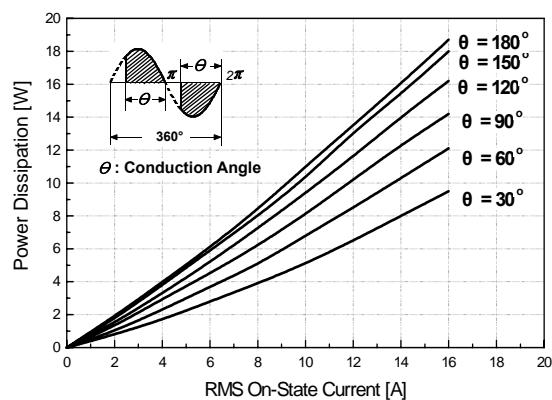

**Fig 5. Surge On-State Current Rating
(Non-Repetitive)**



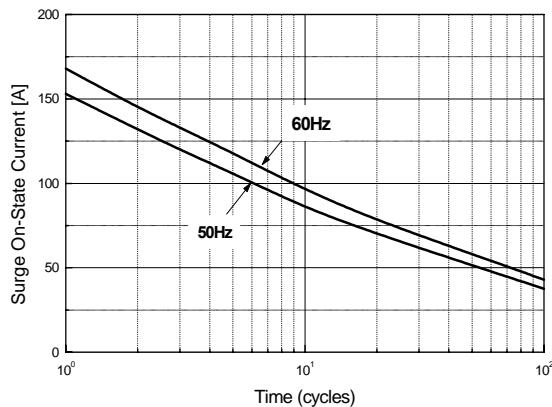


Fig 2. On-State Voltage

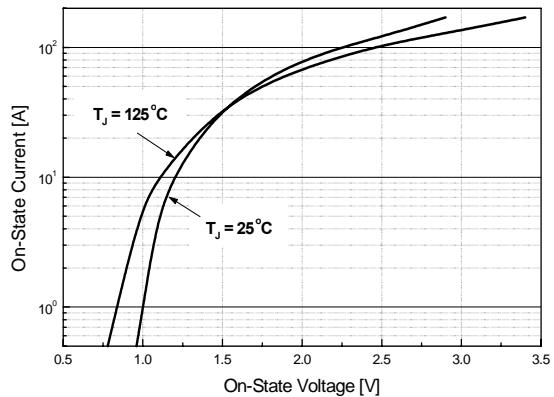

**Fig 4. On State Current vs.
Allowable Case Temperature**

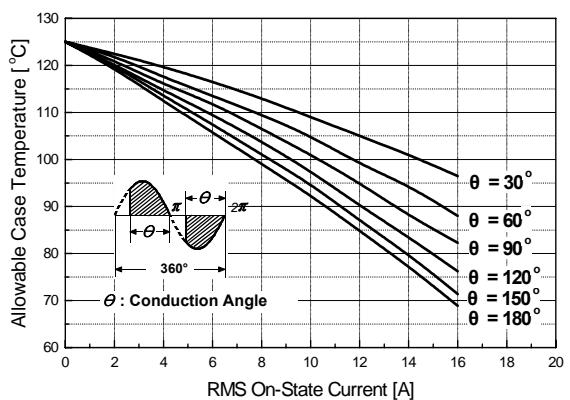

**Fig 6. Gate Trigger Voltage vs.
Junction Temperature**

