

# TK13A50D




## Switching Regulator Applications

- Low drain-source ON resistance:  $R_{DS(ON)} = 0.31 \Omega$  (typ.)
- High forward transfer admittance:  $|Y_{fs}| = 7.5 \text{ S}$  (typ.)
- Low leakage current:  $I_{DSS} = 10 \mu\text{A}$  (max) ( $V_{DS} = 500 \text{ V}$ )
- Enhancement-mode:  $V_{th} = 2.0$  to  $4.0 \text{ V}$  ( $V_{DS} = 10 \text{ V}$ ,  $I_D = 1 \text{ mA}$ )

## Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Characteristics	Symbol	Rating	Unit
Drain-source voltage	$V_{DSS}$	500	V
Gate-source voltage	$V_{GSS}$	$\pm 30$	V
Drain current	DC (Note 1)	$I_D$	A
	Pulse (Note 1)	$I_{DP}$	
Drain power dissipation ( $T_c = 25^\circ\text{C}$ )	$P_D$	45	W
Single pulse avalanche energy (Note 2)	$E_{AS}$	390	mJ
Avalanche current	$I_{AR}$	13	A
Repetitive avalanche energy (Note 3)	$E_{AR}$	4.5	mJ
Channel temperature	$T_{ch}$	150	$^\circ\text{C}$
Storage temperature range	$T_{stg}$	-55 to 150	$^\circ\text{C}$

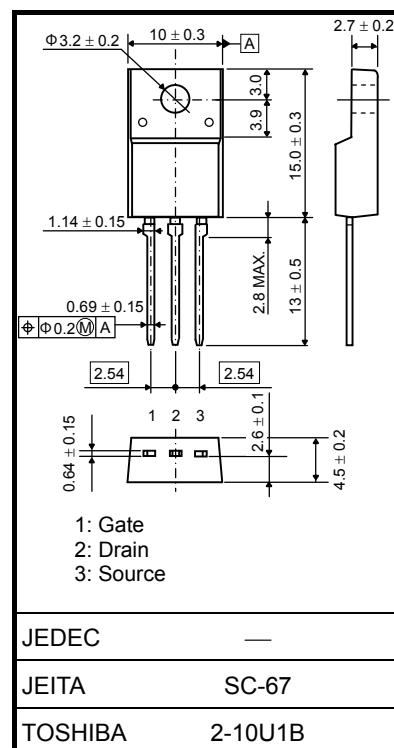

Weight : 1.7 g (typ.)

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings. Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc.).

## Thermal Characteristics

Internal Connection


Characteristics	Symbol	Max	Unit
Thermal resistance, channel to case	$R_{th}(ch-c)$	2.78	$^\circ\text{C}/\text{W}$
Thermal resistance, channel to ambient	$R_{th}(ch-a)$	62.5	$^\circ\text{C}/\text{W}$

Note 1: Please use devices on conditions that the channel temperature is below  $150^\circ\text{C}$ .

Note 2:  $V_{DD} = 90 \text{ V}$ ,  $T_{ch} = 25^\circ\text{C}$  (initial),  $L = 3.92 \text{ mH}$ ,  $R_G = 25 \Omega$ ,  $I_{AR} = 13 \text{ A}$

Note 3: Repetitive rating: pulse width limited by maximum channel temperature

This transistor is an electrostatic sensitive device. Please handle with caution.

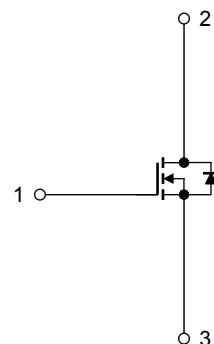


**Electrical Characteristics (Ta = 25°C)**

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit	
Gate leakage current	I <sub>GSS</sub>	V <sub>GS</sub> = ±30 V, V <sub>DS</sub> = 0 V	—	—	±1	µA	
Drain cut-off current	I <sub>DSS</sub>	V <sub>DS</sub> = 500 V, V <sub>GS</sub> = 0 V	—	—	10	µA	
Drain-source breakdown voltage	V <sub>(BR) DSS</sub>	I <sub>D</sub> = 10 mA, V <sub>GS</sub> = 0 V	500	—	—	V	
Gate threshold voltage	V <sub>th</sub>	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 1 mA	2.0	—	4.0	V	
Drain-source ON resistance	R <sub>DS</sub> (ON)	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 6.5 A	—	0.31	0.4	Ω	
Forward transfer admittance	Y <sub>fs</sub>	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 6.5 A	1.9	7.5	—	S	
Input capacitance	C <sub>iss</sub>	V <sub>DS</sub> = 25 V, V <sub>GS</sub> = 0 V, f = 1 MHz	—	1800	—	pF	
Reverse transfer capacitance	C <sub>rss</sub>		—	9	—		
Output capacitance	C <sub>oss</sub>		—	190	—		
Switching time	Rise time	t <sub>r</sub>	 10 V V <sub>GS</sub> 0 V 50 Ω ID = 6.5 A V <sub>OUT</sub> RL = 31 Ω V <sub>DD</sub> ≈ 200 V Duty ≤ 1%, t <sub>W</sub> = 10 µs	—	40	—	ns
	Turn-on time	t <sub>on</sub>		—	80	—	
	Fall time	t <sub>f</sub>		—	15	—	
	Turn-off time	t <sub>off</sub>		—	110	—	
Total gate charge	Q <sub>g</sub>	V <sub>DD</sub> ≈ 400 V, V <sub>GS</sub> = 10 V, I <sub>D</sub> = 13 A	—	38	—	nC	
Gate-source charge	Q <sub>gs</sub>		—	24	—		
Gate-drain charge	Q <sub>gd</sub>		—	14	—		

**Source-Drain Ratings and Characteristics (Ta = 25°C)**

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Continuous drain reverse current (Note 1)	I <sub>DR</sub>	—	—	—	13	A
Pulse drain reverse current (Note 1)	I <sub>DRP</sub>	—	—	—	52	A
Forward voltage (diode)	V <sub>DSF</sub>	I <sub>DR</sub> = 13 A, V <sub>GS</sub> = 0 V	—	—	-1.7	V
Reverse recovery time	t <sub>rr</sub>	I <sub>DR</sub> = 13 A, V <sub>GS</sub> = 0 V, dI <sub>DR</sub> /dt = 100 A/µs	—	1200	—	ns
Reverse recovery charge	Q <sub>rr</sub>		—	13	—	µC

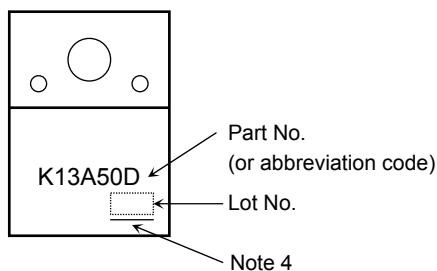**Marking**

Note 4

