



PFC Device Corporation

PFR30V30CT
PFR30V30CTF
PFR30V30CTI
PFR30V30CTB

30A 30V MOS Schottky Rectifier

Major ratings and characteristics


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular Waveform	15×2	A
V_{RRM}	30	V
$V_F@ 15A, T_J=125^\circ C$	0.34	V, typ.
T_J Operating Junction Temperature	-65 to +150	$^\circ C$

Features

- Ultra-Low Forward Voltage Drop
- Reliable High Temperature Operation
- Softest, fast switching capability
- $150^\circ C$ Operating Junction Temperature
- Lead Free Finish, RoHS Compliant

Typical Applications

Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications

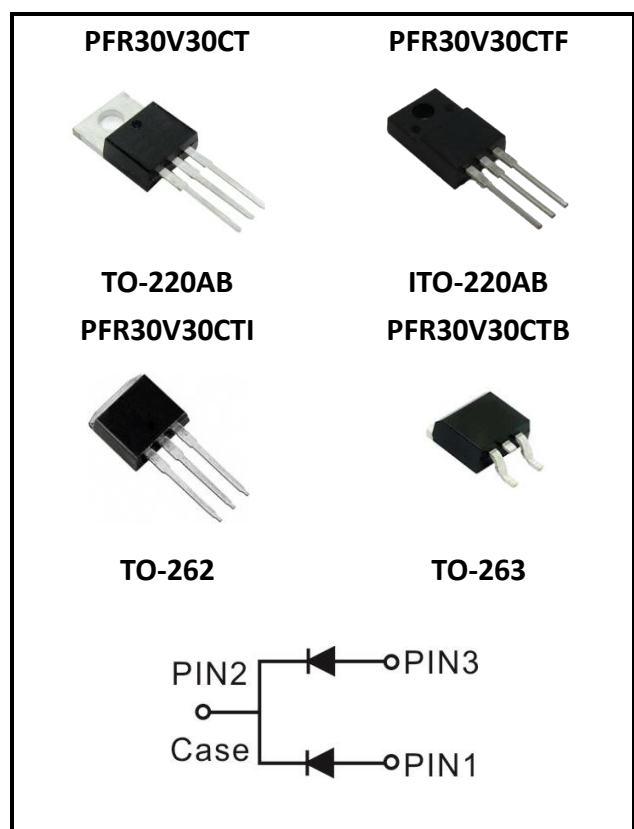

Maximum Ratings Characteristics ($T_A = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Values	Units
DC Blocking Voltage	V _{RM}	30	Volts
Working Peak Reverse Voltage	V _{RWM}		
Peak Repetitive Reverse Voltage	V _{RRM}		
Average Rectified Forward Current Per device	I _o	30	Amps
(Rated VR-20Khz Square Wave) - 50% duty cycle			
Peak Forward Surge Current - 1/2 60hz	I _{FSM}	280	Amps
Peak Repetitive Reverse Surge Current (2uS-1Khz)	I _{RRM}	2	Amps
Typical Thermal Resistance (per leg) Package = TO-220AB Package =ITO-220AB Package =TO-262 Package =TO-263	Rθ _{Jc}	2	°C / W
		4	
		2.5	
		3	
Isolation voltage (ITO-220 only)	V _{AC}	1500	V
Maximum Rate of Voltage Change (at Rated V _R)	dv/dt	10000	V/uS
Operating Junction Temperature	T _j	- 65 to +150	°C
Storage Junction Temperature	T _{STG}	- 65 to +150	

Parameter	Test Conditions		Symbol	Typ.	Max.	Units
Instantaneous Forward Voltage	IF = 15 A	T _J = 25 °C	VF*	----	0.44	Volts
		T _J = 125 °C		0.34	0.37	
Instantaneous Reverse Current	At V _{RM}	T _J = 25 °C	IR*	----	1000	uA
		T _J = 125 °C		----	150	mA

* Pulse width < 300 uS, Duty cycle < 2%

2. Characteristics Curves

Ratings and Characteristics Curves

($T_A = 25^{\circ}\text{C}$ unless otherwise specified)

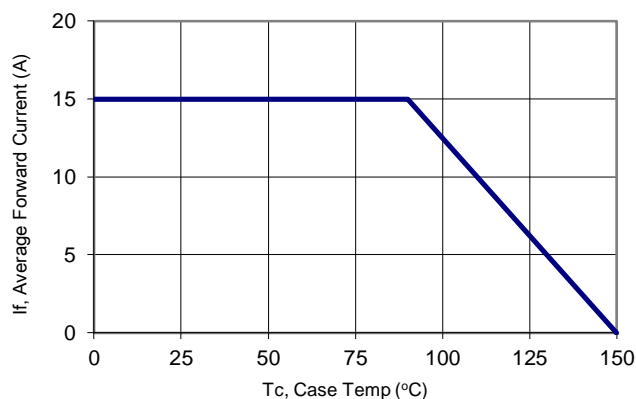


Figure 1: Current Derating, Case

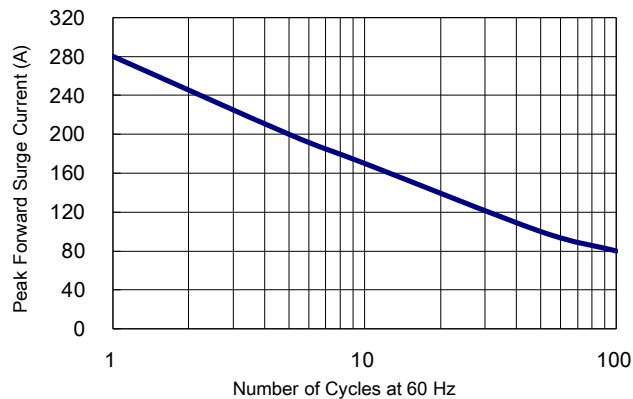


Figure 2: Maximum Repetitive Surge Current

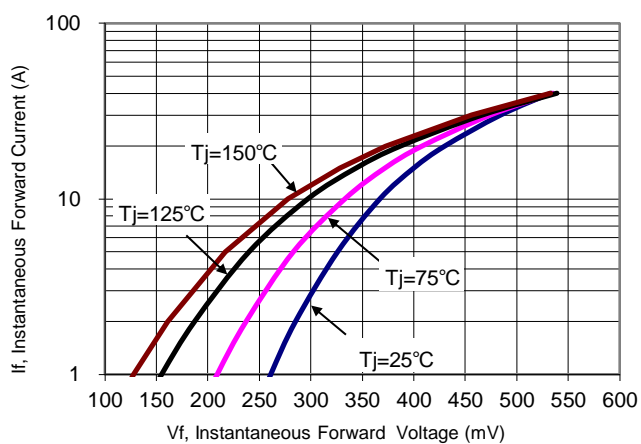


Figure 3: Typical Forward Voltage

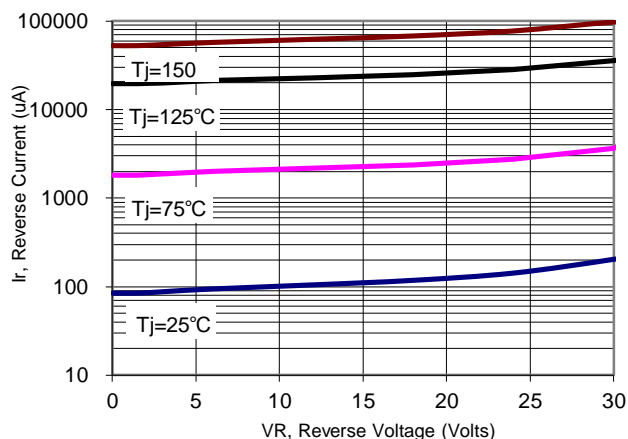


Figure 4: Typical Reverse Current

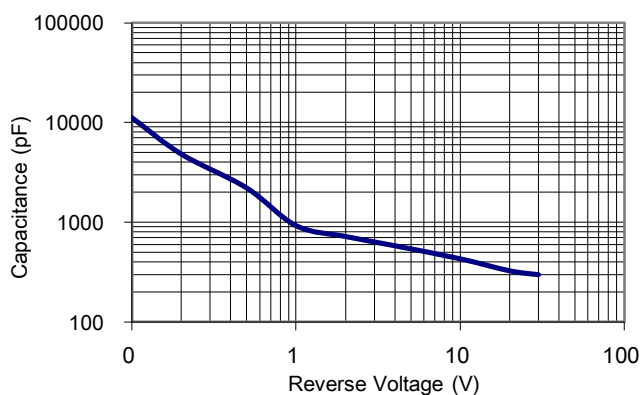


Figure 5: Typical Junction Capacitance

3. Marking information

Top Marking Rule

PFC PFR
30V30CT
YYWW ABSH

PFR30V30CT = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

PFC PFR
30V30CTF
YYWW ABSH

PFR30V30CTF = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

PFC PFR
30V30CTI
YYWW ABSH

PFR30V30CTI = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

PFC PFR
30V30CTB
YYWW ABSH

PFR30V30CTB = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

5. Ordering information

Part Number	Package	Delivery mode
PFR30V30CT	TO-220AB	50 pieces / tube
PFR30V30CTF	ITO-220AB	50 pieces / tube
PFR30V30CTI	TO-262	50 pieces / tube
PFR30V30CTB	TO-263	800 pieces / 13" diameter reel

Note: For Halogen Free molding compound, add "H" suffix to part number above.

Mechanical

- Molder Plastic: UL Flammability Classification Rating 94V-0
- Device Weight : 0.07 ounces (1.96grams) - TO-220AB
0.06 ounces (1.74grams) - ITO-220AB
0.05 ounces (1.45 grams) - TO-262
0.04 ounces (1.16 grams) - TO-263
- Mounting Torque : Recommended 4~5 kg-cm.