



PFC Device Corporation

PFR40L60CT
PFR40L60CTF
PFR40L60CTI
PFR40L60CTB

40A 60V MOS Schottky Rectifier

Major ratings and characteristics


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular Waveform	20 × 2	A
V_{RRM}	60	V
$V_F@ 20A, T_J=125^{\circ}C$	0.56	V, typ.
T_J Operating Junction Temperature	-65 to +150	$^{\circ}C$

Features

- Low Forward Voltage Drop
- Reliable High Temperature Operation
- Softest, fast switching capability
- 150 $^{\circ}C$ Operating Junction Temperature
- Lead Free Finish, RoHS Compliant

Typical Applications

Device optimized for low forward voltage drop to maximize efficiency in Power Supply applications

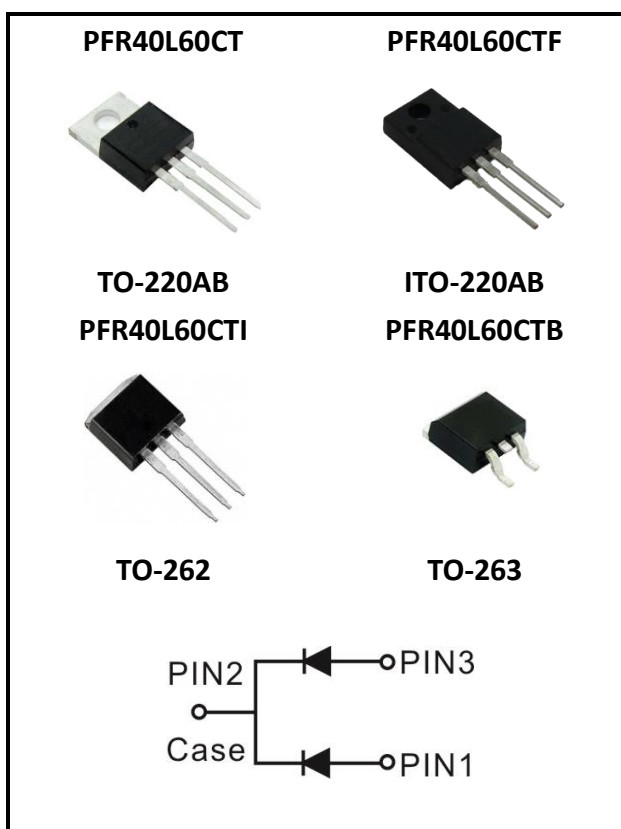

Characteristics

PFR40L60

1. Characteristics

Maximum Ratings Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Values	Units		
DC Blocking Voltage	V_{RM}	60	Volts		
Working Peak Reverse Voltage	V_{RWM}				
Peak Repetitive Reverse Voltage	V_{RRM}				
Average Rectified Forward Current Per device	I_o	40	Amps		
(Rated VR-20Khz Square Wave) - 50% duty cycle					
Peak Forward Surge Current - 1/2 60hz	I_{FSM}	280	Amps		
Peak Repetitive Reverse Surge Current (2uS-1Khz)	I_{RRM}	2	Amps		
Typical Thermal Resistance (per leg) Package = TO-220AB Package = ITO-220AB Package = TO-262 Package = TO-263	$R\theta_{JC}$	2 4 2.5 3	°C / W		
Isolation voltage (ITO-220 only)		V_{AC}		1500	V
Maximum Rate of Voltage Change (at Rated V_R)		dv/dt		10000	V/uS
Operating Junction Temperature		T_J		- 65 to +150	°C
Storage Junction Temperature	T_{STG}	- 65 to +150			

Electrical Characteristics - (per leg)

($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Test Conditions		Symbol	Typ.	Max.	Units
Instantaneous Forward Voltage	IF = 20 A	T _J = 25 °C	VF*	----	0.65	Volts
		T _J = 125 °C		0.56	0.6	
Instantaneous Reverse Current	At V _{RM}	T _J = 25 °C	IR*	----	500	uA
		T _J = 125 °C		----	100	mA
* Pulse width < 300 uS, Duty cycle < 2%						

2. Characteristics Curves

Ratings and Characteristics Curves

($T_A = 25^{\circ}\text{C}$ unless otherwise specified)

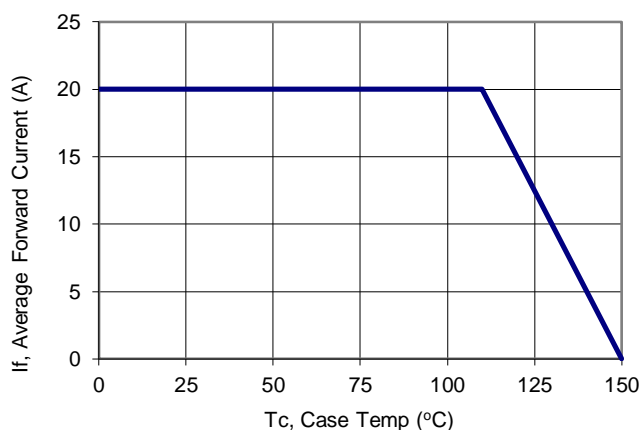


Figure 1: Current Derating, Case

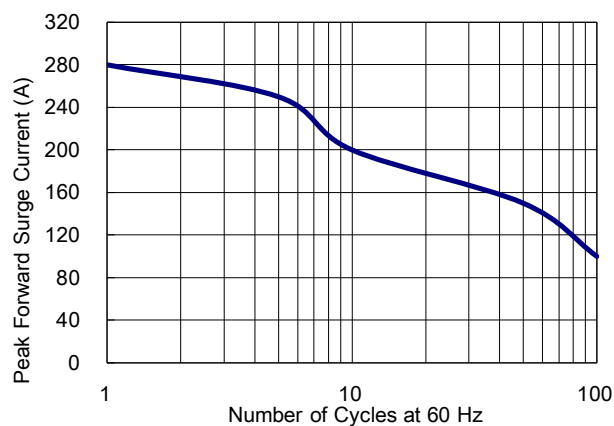


Figure 2: Maximum Repetitive Surge Current

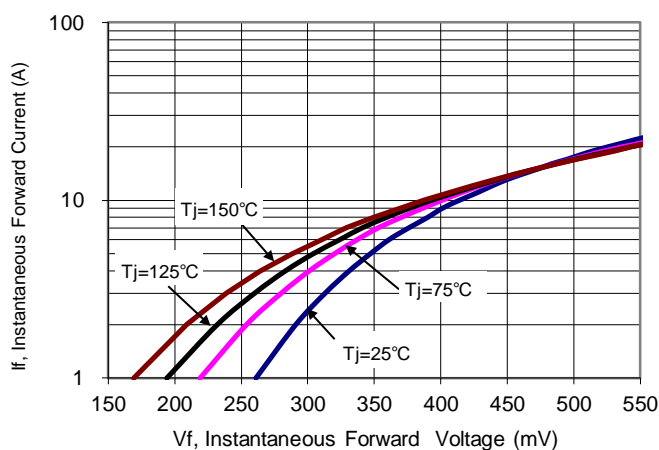


Figure 3: Typical Forward Voltage

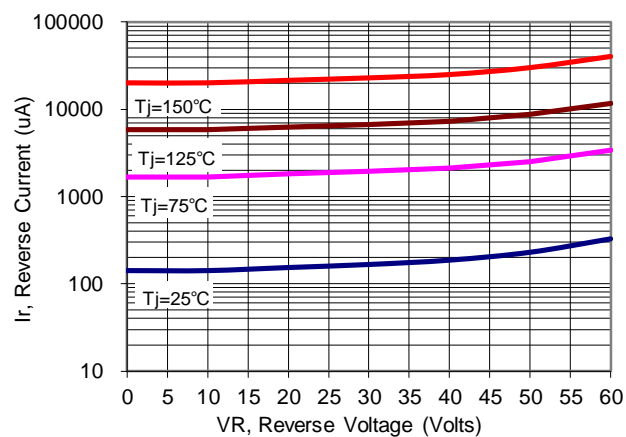


Figure 4: Typical Reverse Current

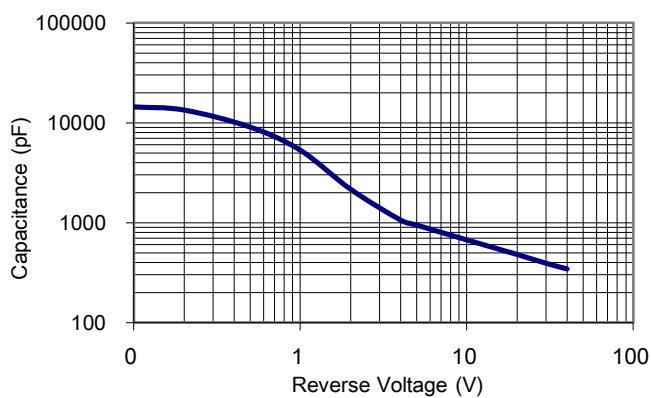


Figure 5: Typical Junction Capacitance

3. Marking information

Top Marking Rule

PFC PFR
40L60CT
YYWW ABSH

PFR40L60CT = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

PFC PFR
40L60CTF
YYWW ABSH

PFR40L60CTF = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

PFC PFR
40L60CTI
YYWW ABSH

PFR40L60CTI = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

PFC PFR
40L60CTB
YYWW ABSH

PFR40L60CTB = Product Type Marking Code

YYWW = Date Code

YY = Last two digits of year

WW = Week code

AB = Assembly code

S = Series Number

H = Halogen Free (N/A = common molding compound)

5. Ordering information

Part Number	Package	Delivery mode
PFR40L60CT	TO-220AB	50 pieces / tube
PFR40L60CTF	ITO-220AB	50 pieces / tube
PFR40L60CTI	TO-262	50 pieces / tube
PFR40L60CTB	TO-263	800 pieces / 13" diameter reel

Note: For Halogen Free molding compound, add "H" suffix to part number above.

Mechanical

- Molder Plastic: UL Flammability Classification Rating 94V-0
- Device Weight : 0.07 ounces (1.96grams) - TO-220AB
0.06 ounces (1.74grams) - ITO-220AB
0.05 ounces (1.45 grams) - TO-262
0.04 ounces (1.16 grams) - TO-263
- Mounting Torque : Recommended 4~5 kg-cm.